
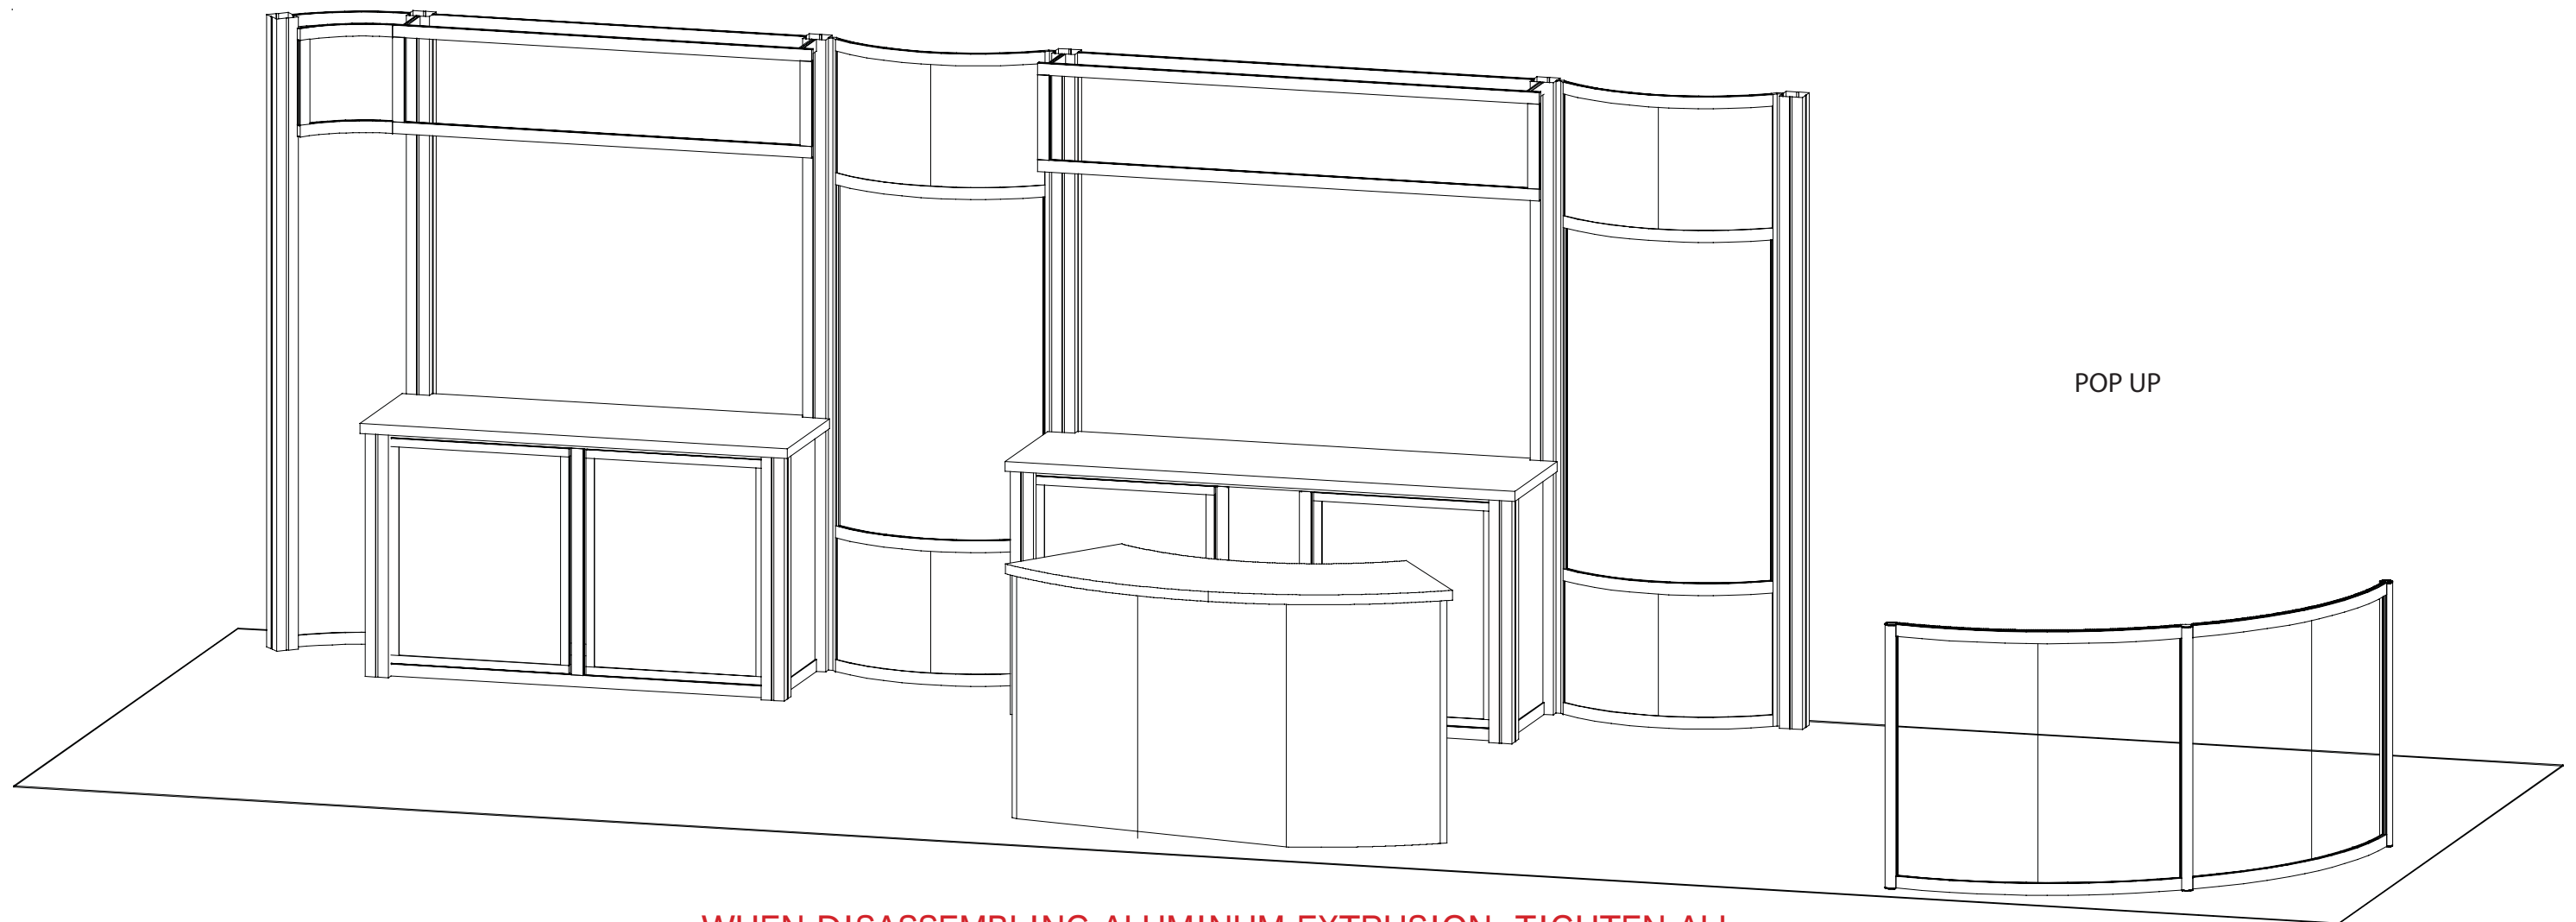


euro It | *HYBRIDS*

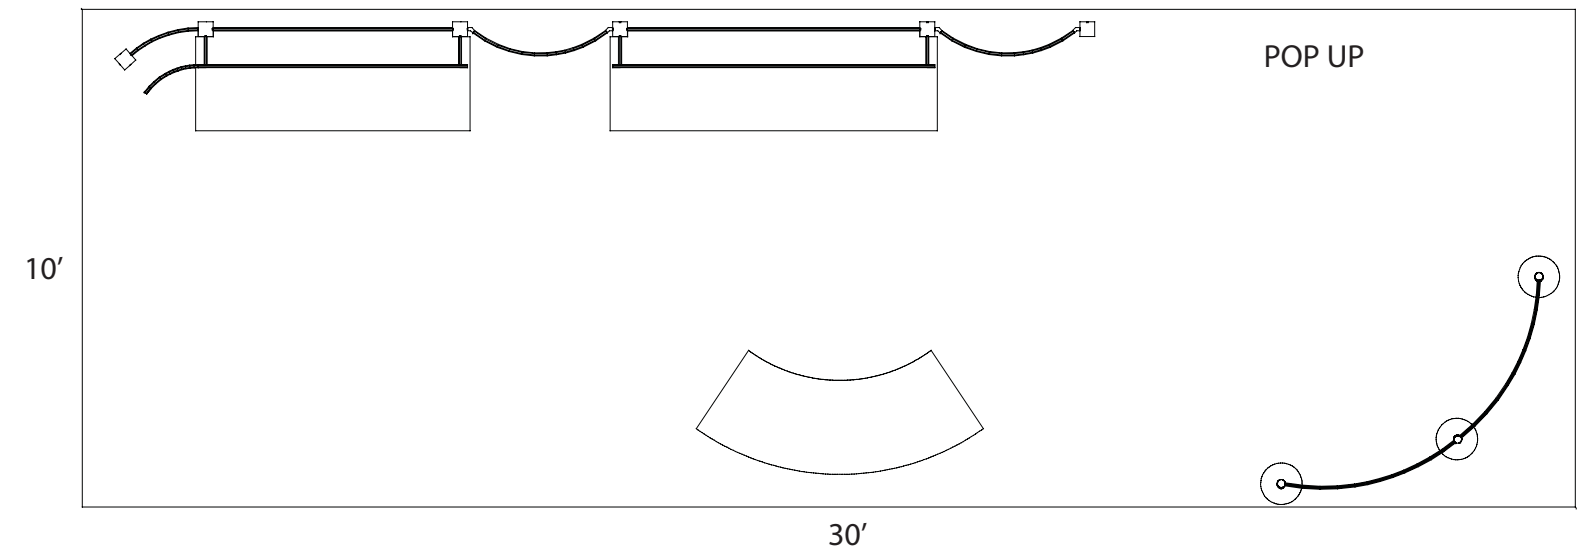

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL
SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

euro lt | HYBRIDS

Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.

Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.


General Setup Instructions for Extrusion System



Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

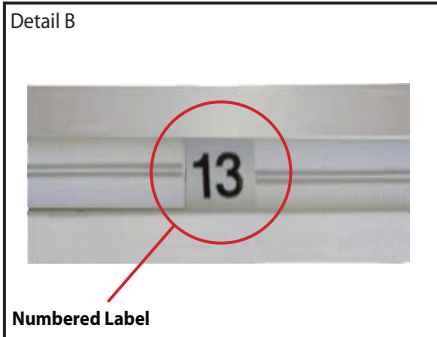


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.



Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

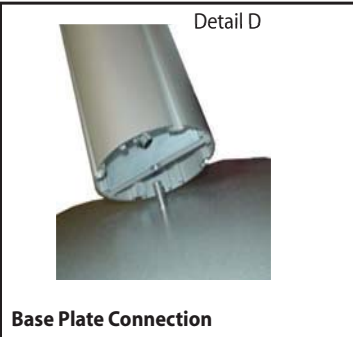


Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

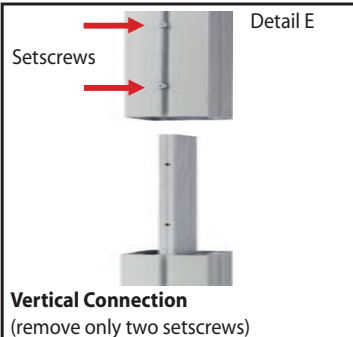


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller section which then require assembly.


Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

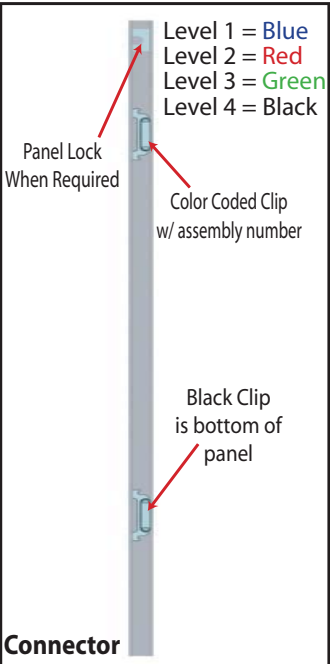


Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

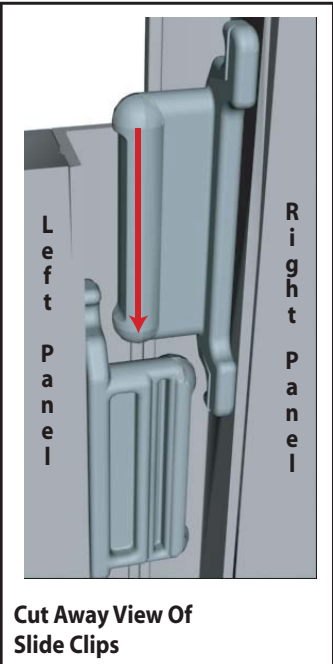

Components connect together by aligning them and sliding downward connecting clips together.

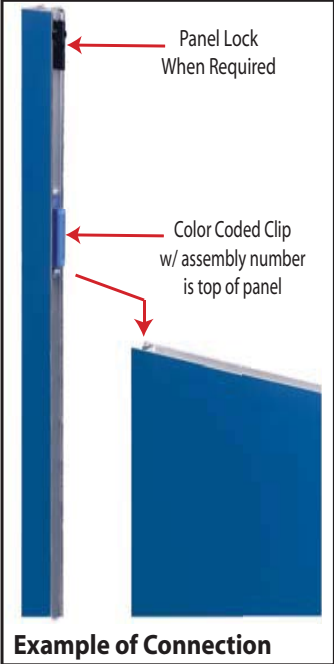

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

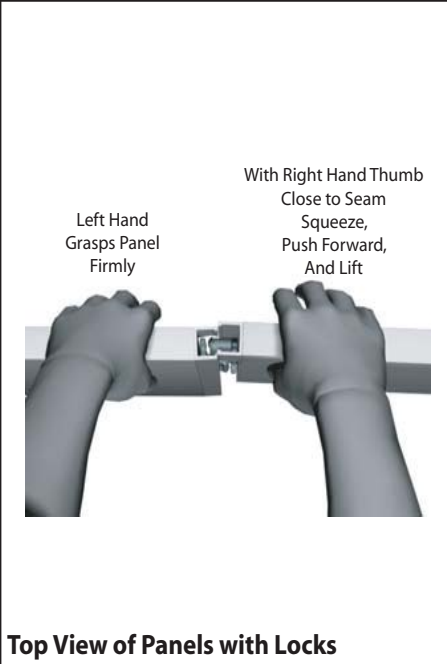

The first level of components contain panel locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.




WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Part Number	Qty for Step	Description
1	2	96"h Vertical Extrusion
2/2a	1/1	96"h Vertical Extrusion/ 96"h 120° Connector attached
3/3a	1/1	96"h Vertical Extrusion/ 96"h 120° Connector attached
4/4a	1/1	96"h Vertical Extrusion/ 96"h 120° Connector attached
5/5a	11	96"h Vertical Extrusion/ 96"h 120° Connector attached
6	2	18"w Curved Horizontal Extrusion
7/7a	2/1	57.75"w Horizontal Extrusion/ 57.75"w Horizontal Extrusion w/ Thumbscrew Holes
8	4	34.979"w Curved Horiaontal Extrusion
9/9a	2/1	57.75"w Horizontal Extrusion/ 57.75"w Horizontal Extrusion w/ Thumbscrew Holes
10	4	34.979"w Curved Horiaontal Extrusion
12	2	40"h Round Vertical Extrusion
13	1	40"h Round Vertical Extrusion
14	4	43.828"w Curved Horizontal Extrusion

Steps

- 1) Attach horizontal extrusions [6] between vertical extrusions [1] placing insert as shown.
- 2) Attach horizontal extrusions [7 and 7a] between vertical extrusions [1 and 2] placing inserts as shown.
NOTE: Vertical Extrusions [2a, 3a, 4a, and 5a] should pack already attached to the extrusion with corresponding number.
- 3) Attach horizontal extrusions [8] between vertical extrusions [2a and 3a] placing inserts as shown.
- 4) Attach horizontal extrusions [9 and 9a] between vertical extrusions [3 and 4] placing inserts as shown.
- 5) Attach horizontal extrusions [10] between vertical extrusions [4a and 5a] placing inserts as shown.
- 6) Attach horizontal extrusions [14] between vertical extrusions [12 and 13] placing inserts as shown.
- 7) Attach reflectors to backside of extrusions [2a, 3a, 4a, and 5a]. See Detail.

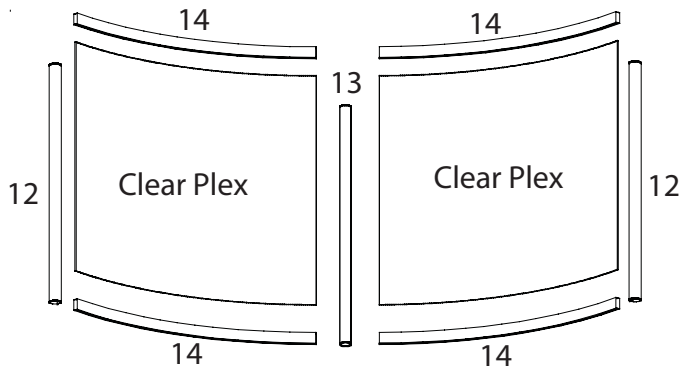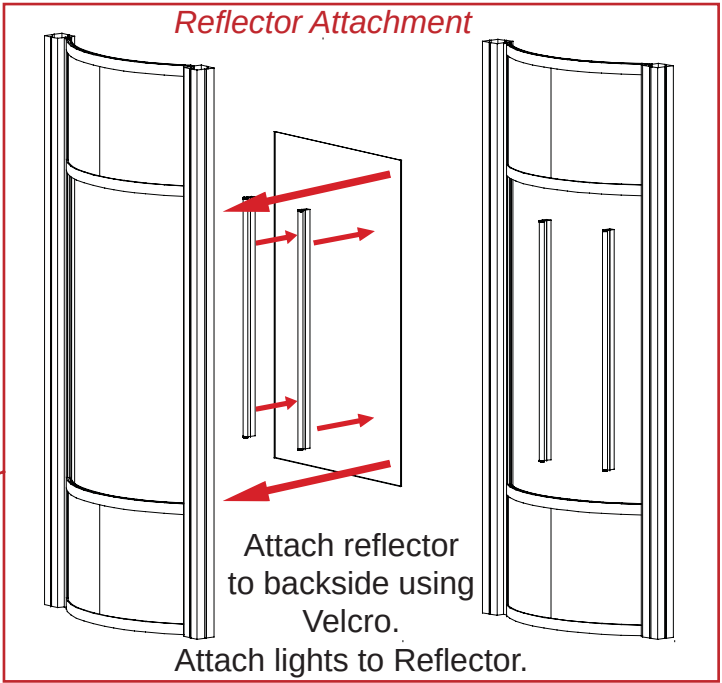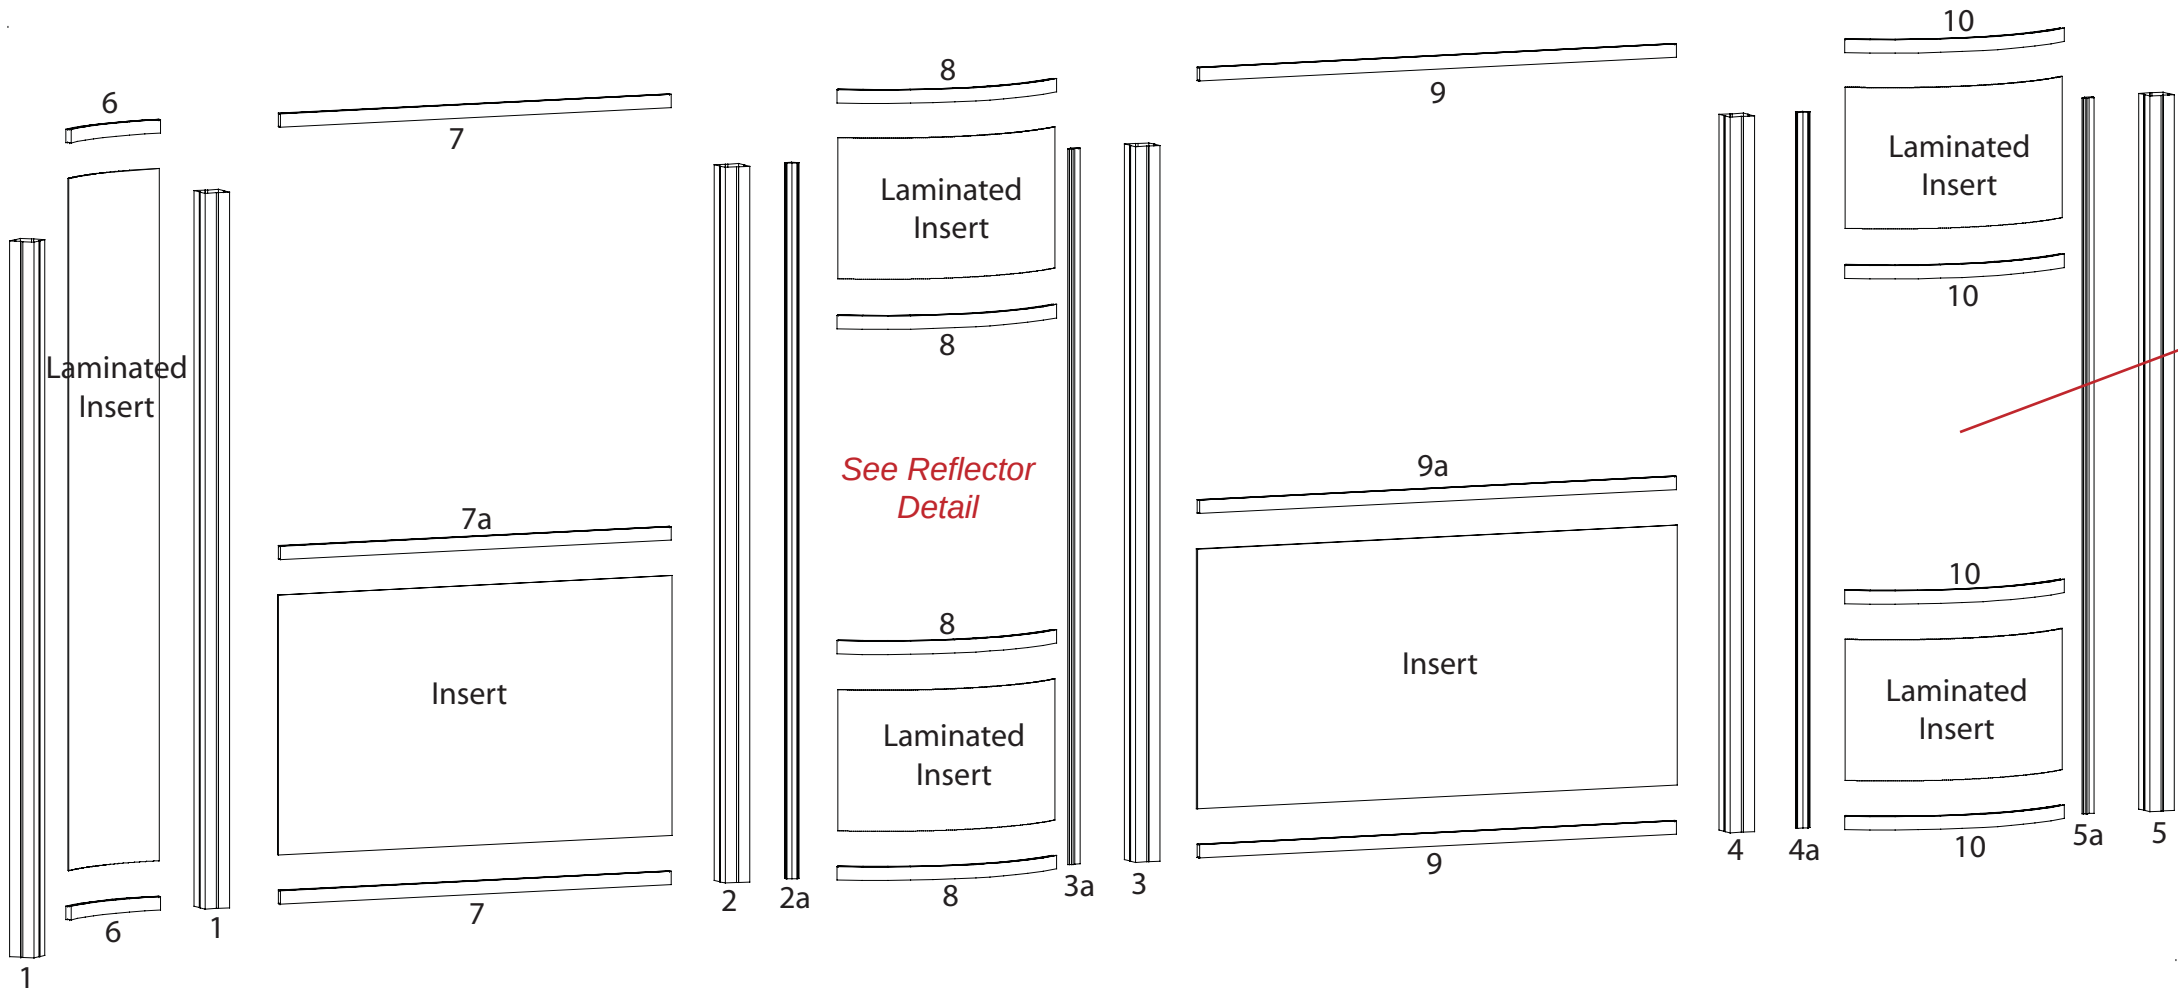


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Part Number	Qty for Step	Description
15	4	38"h Vertical Extrusion w/ Door Hinges Attached
16	8	18.5"w Horizontal Extrusion
17	2	57.75"w Horizontal Extrusion
18	1	34.418"h Vertical Extrusion w/ Door Stops Attached
19	2	70.5""w Horizontal Extrusion
20	2	34.418"h Vertical Extrusion w/ Door Stops Attached

Steps

- 1) Attach horizontal extrusions [16] between vertical extrusions [existing from previous page and 15] placing insert as shown.
- 2) Attach lower horizontal extrusion [17] between vertical extrusions [15].
- 3) Connect vertical extrusion [18] to center of horizontal extrusion [17] placing Doors as shown.
- 4) Attach upper horizontal extrusion [17] between vertical extrusions [15] placing inserts as shown.
- 5) Attach lower horizontal extrusion [19] between vertical extrusions [15].
- 6) Connect vertical extrusion [20] to horizontal extrusion [19] placing Doors and inserts as shown.
- 7) Attach upper horizontal extrusion [19] between vertical extrusions [15].

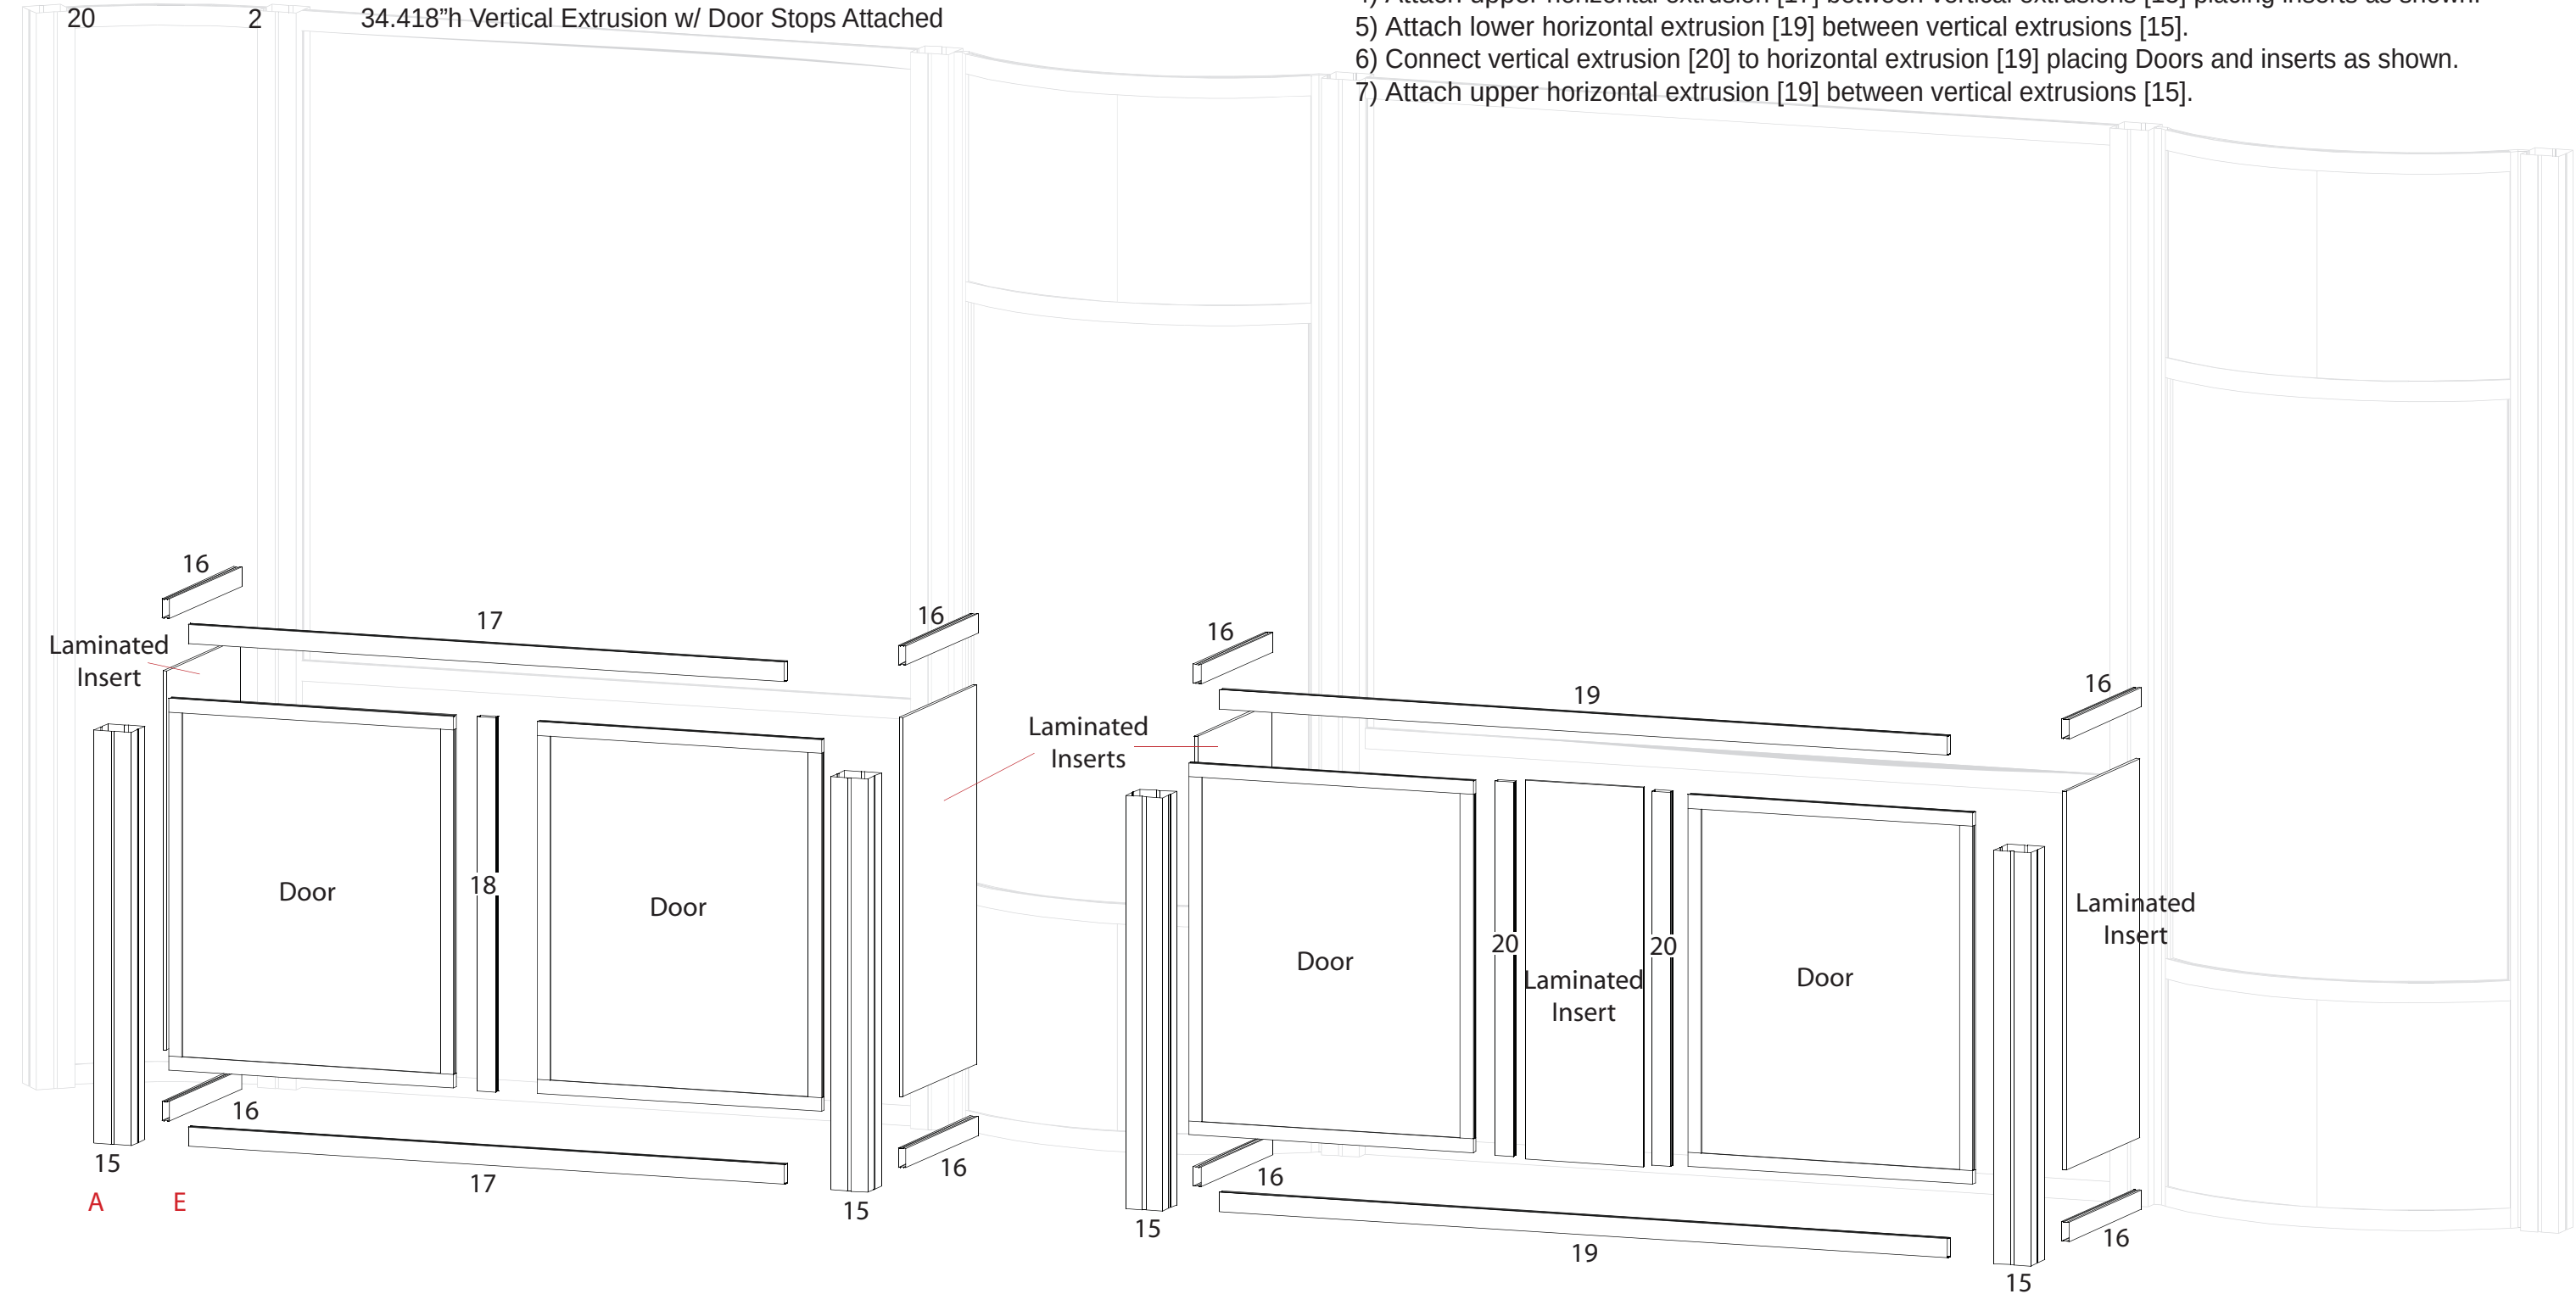

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING


866.652.2100

Part Number	Qty for Step	Description
21	5	12.918"h Vertical Extrusion
22	2	64.915"w Horizontal Extrusion
23	2	15.19"w Curved Horizontal Extrusion
24	2	77.665"h Vertical Extrusion
25	8	6.75"w Horizontal Extrusion

Steps

NOTE: Headers should pack assembled.

1) Attach horizontal extrusions [25] between vertical from previous pages and header frames as shown.

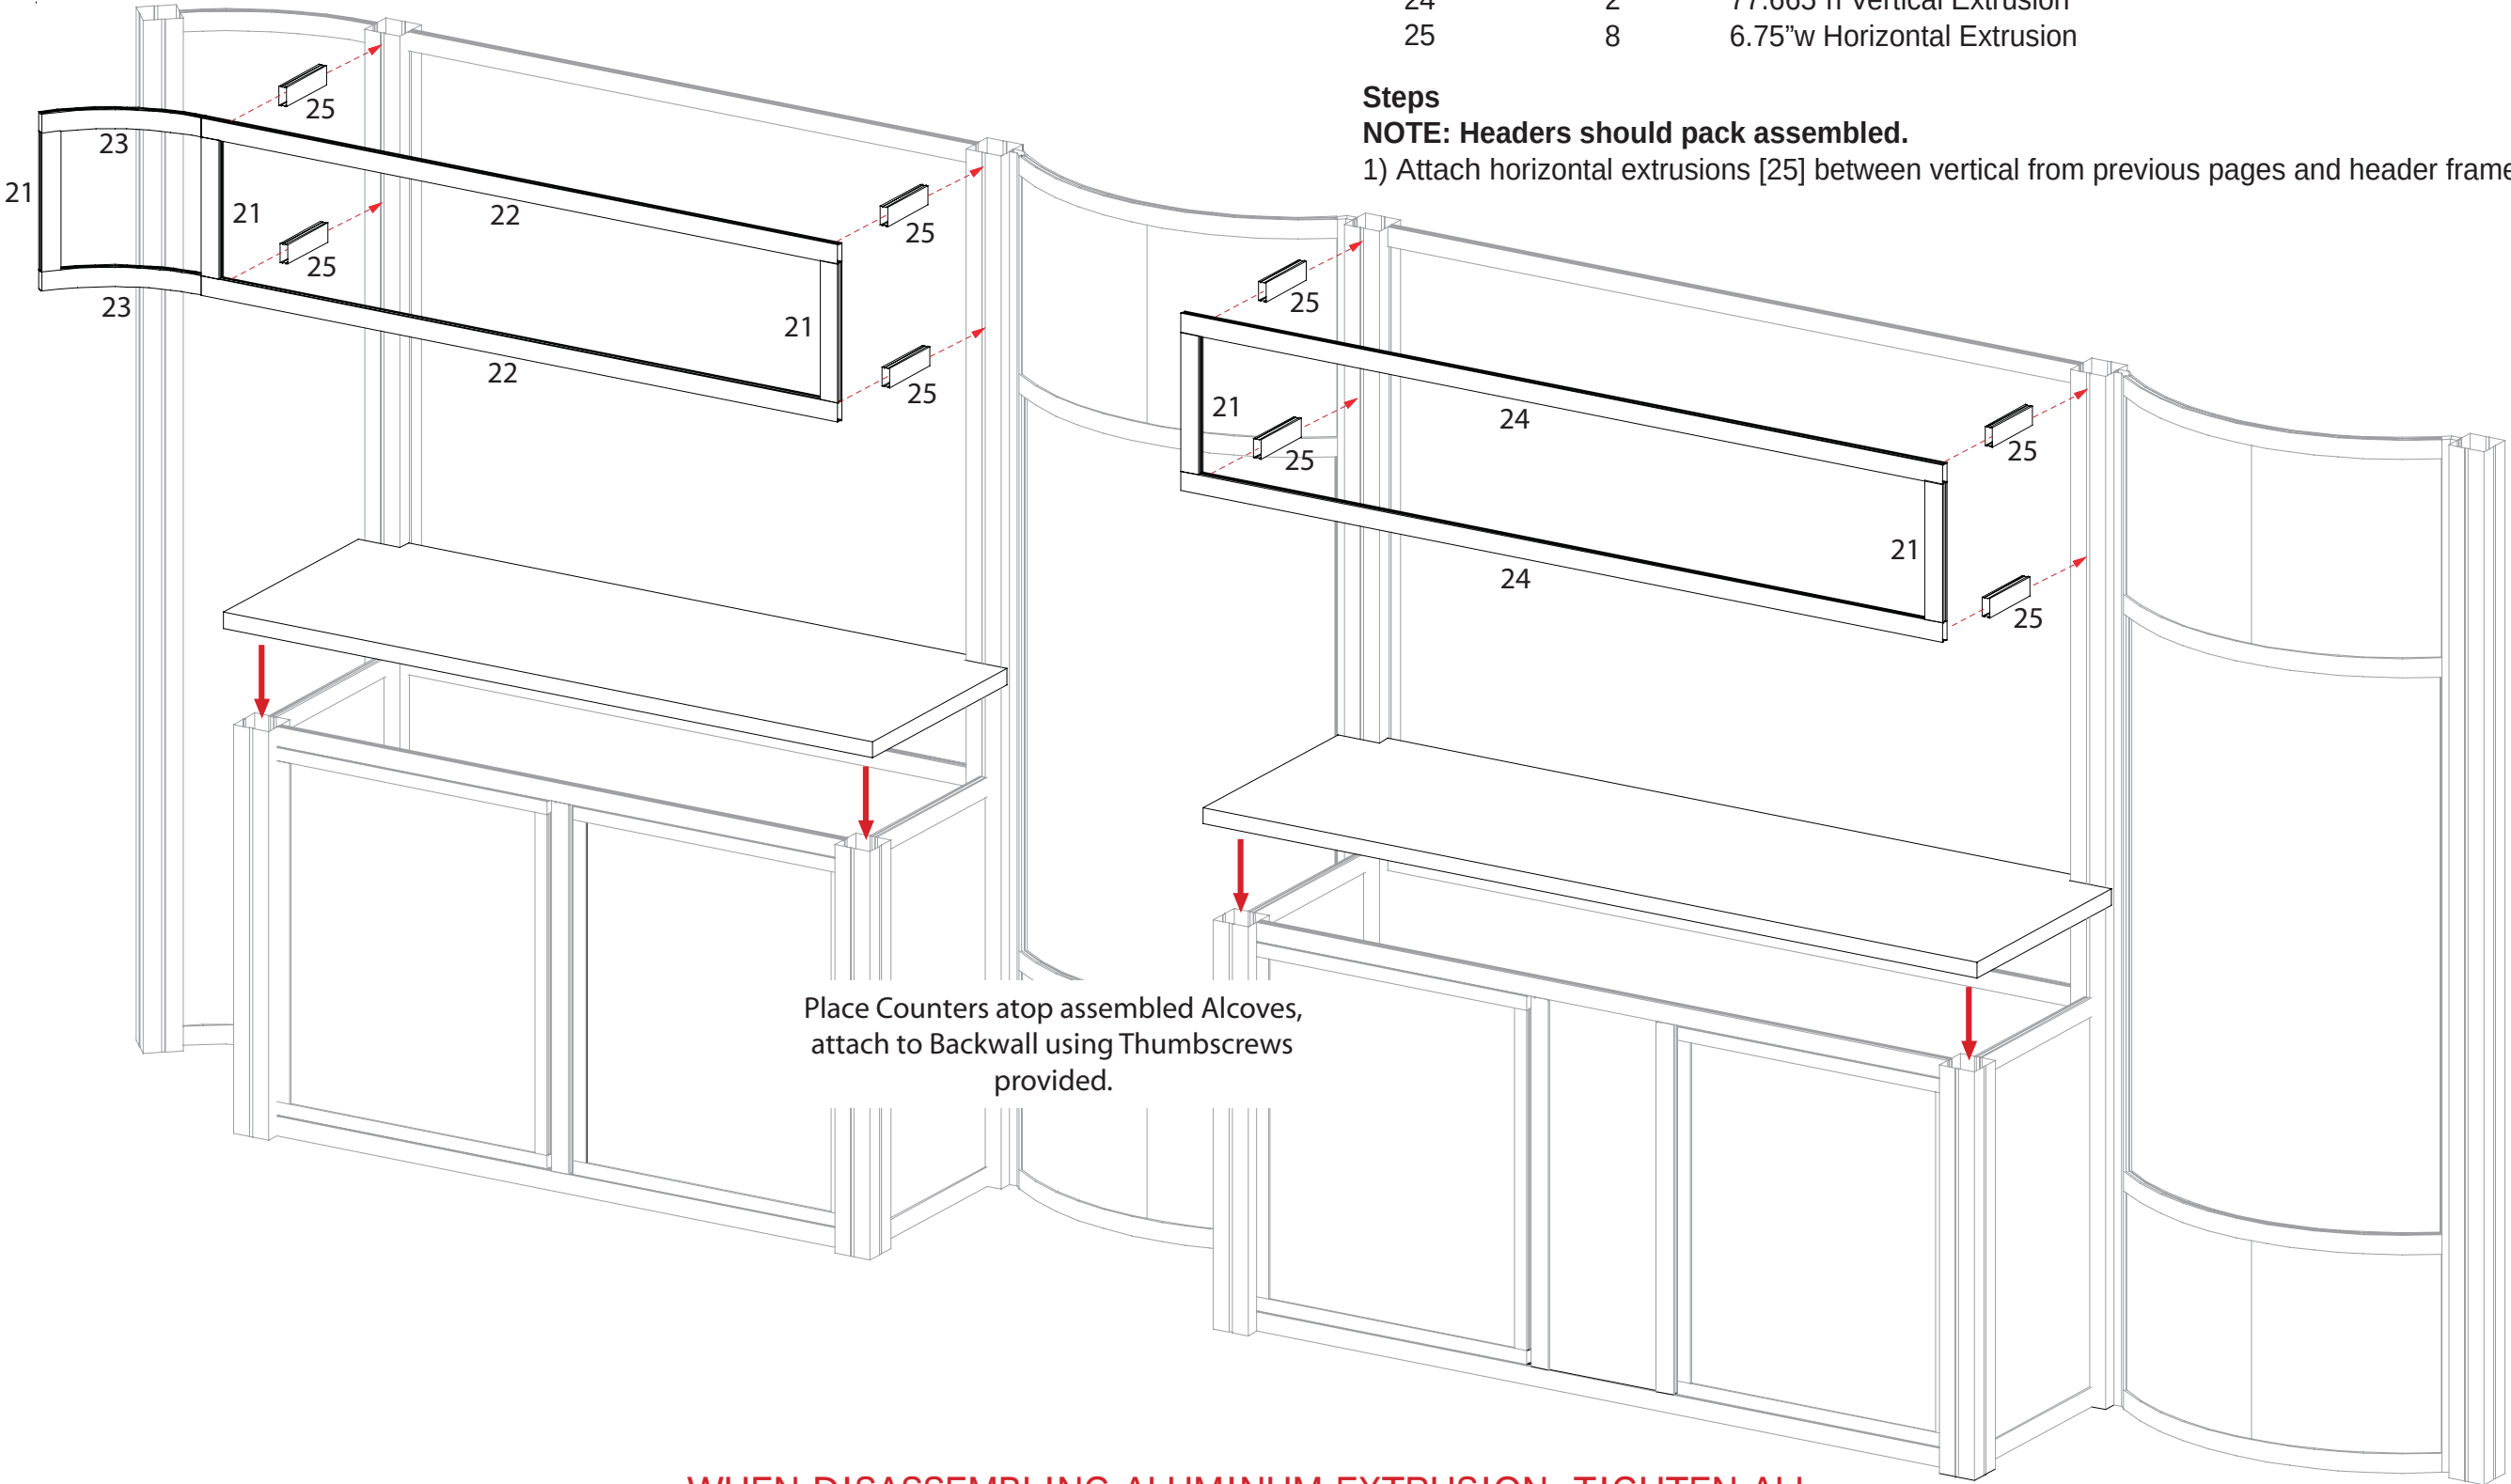

Place Counters atop assembled Alcoves,
attach to Backwall using Thumbscrews
provided.




WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL
SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Item Number	Description
1	38"h Curved Panel w/ Door
2	38"h Curved Panel w/ Door
3	38"h 90° Connector
4	19"w x 38"h Flat Panel
5	38"h 90° Connector
6	38"h Curved Panel
7	38"h Curved Panel
8	38"h Curved Panel
9	38"h 90° Connector
10	19"w x 38"h Flat Panel
11	38"h 90° Connector

Steps:
Connect panels together in numerical order as shown in illustrations.

Set counter atop assembled pedestal.

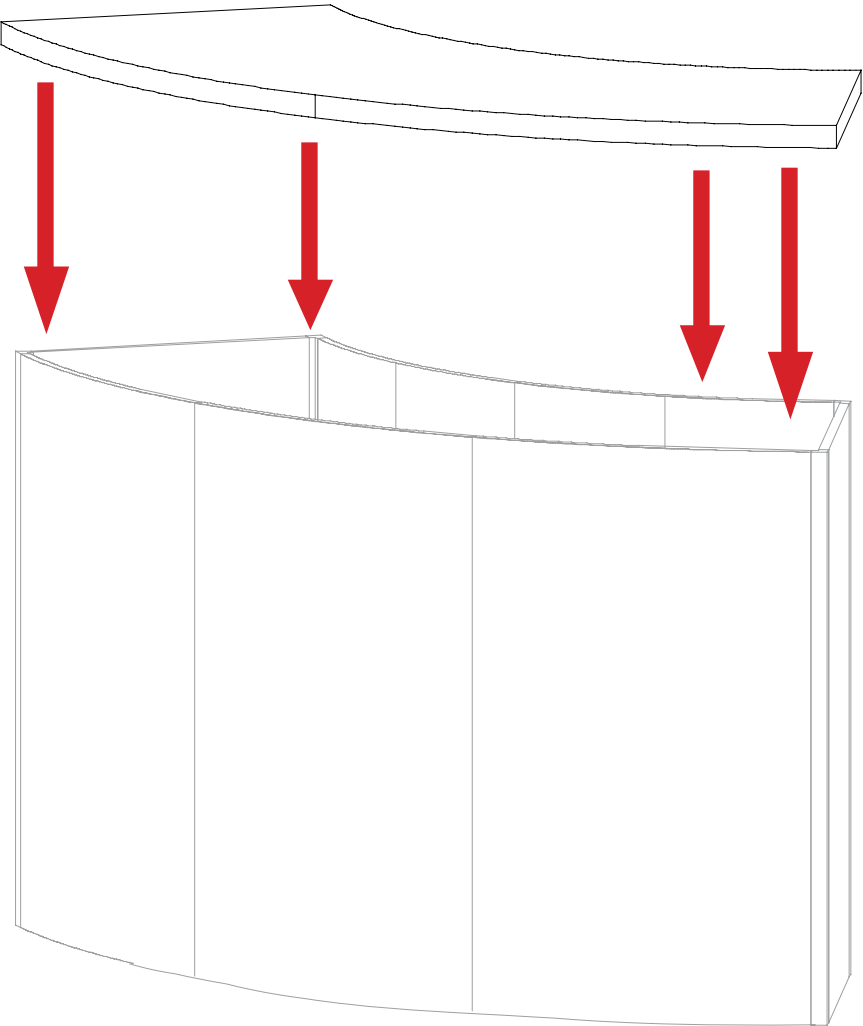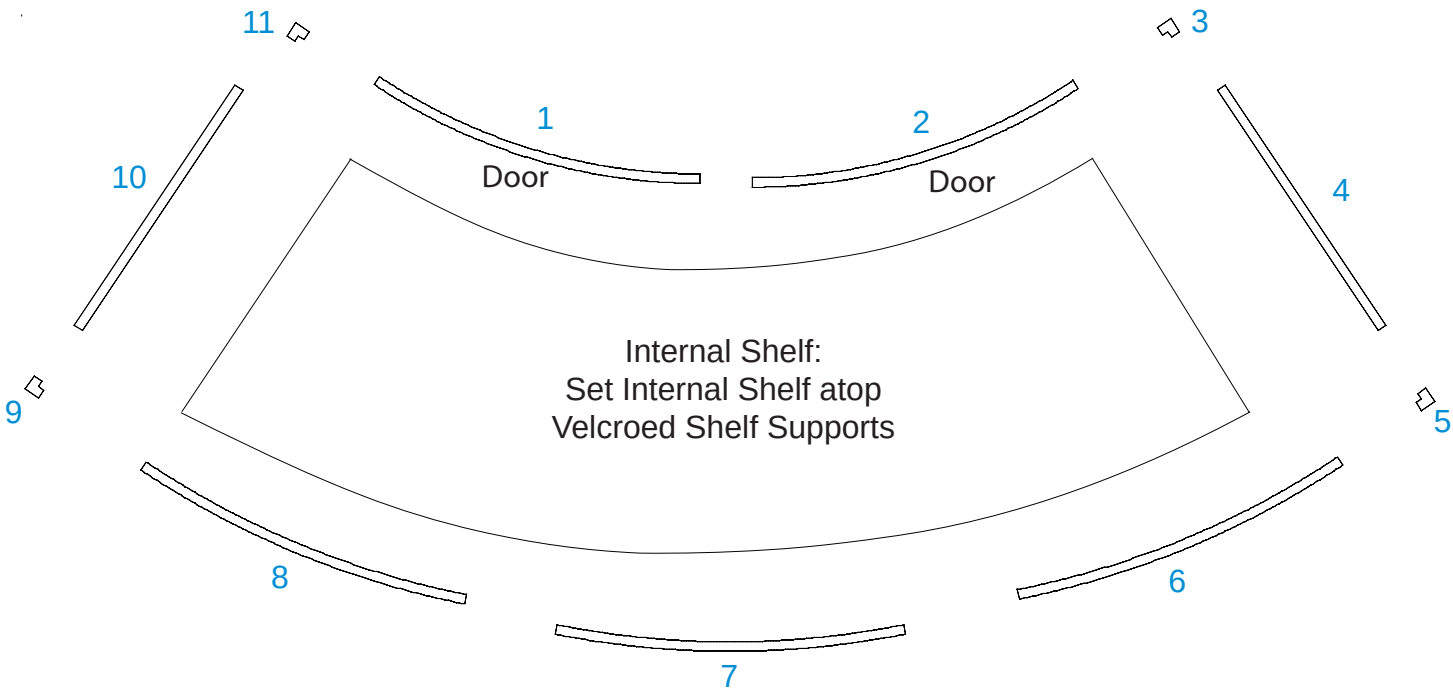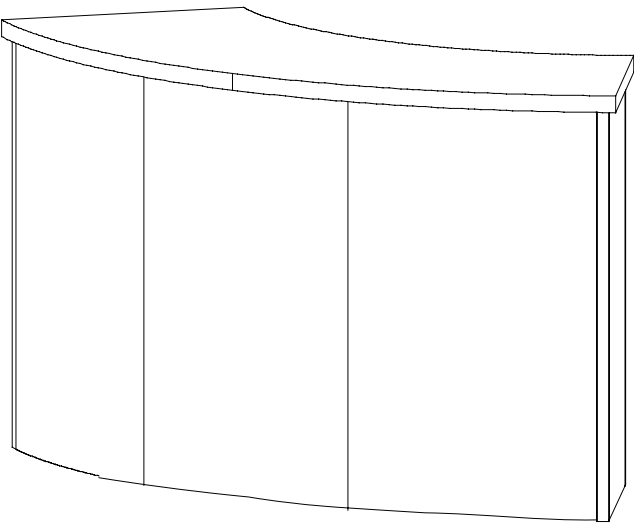


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Part Number	Qty for Step	Description
26	1	Base Plate
27	1	38"h Vertical extrusion

- Steps**
- 1) Attach 38"h Vertical extrusion to Base Plate as shown.
 - 2) Attach Counter atop Vertical extrusion.

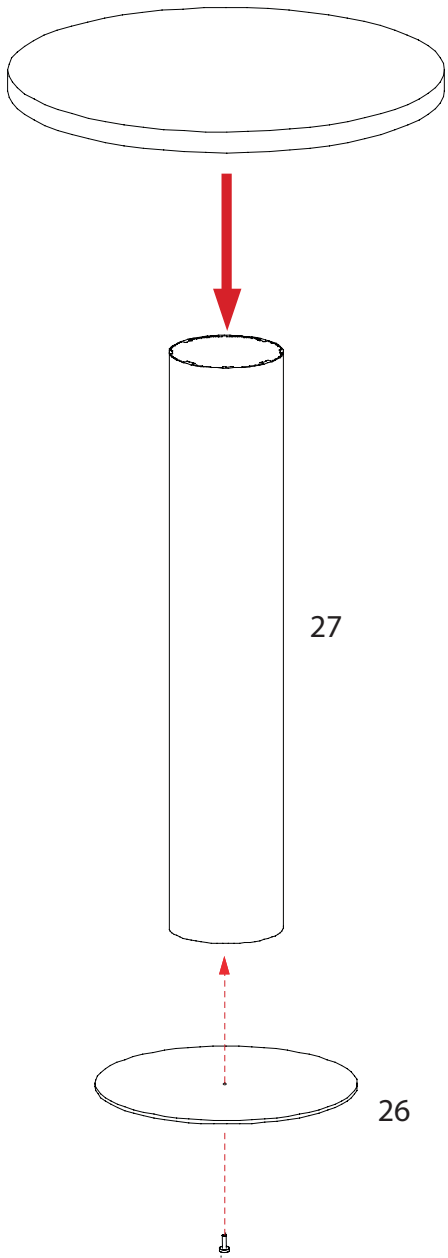

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING