



Modul Extrusion Part List





Item	Qty.	Description
1	1	44.5”h Round Vertical Extrusion w/ Connector Attached
2	1	44.5”h Round Vertical Extrusion
3	1	44.5”h Round Vertical Extrusion w/ Connector Attached
4	1	44.5”h Round Vertical Extrusion
5	4	9.029”w Horizontal Extrusion
5a	1	9.029”w Horizontal Extrusion
6	2	13”w Horizontal Extrusion

Euro LT Panel System Part List

Item Number	Description
1	Curve Panel
2	Curve Panel w/ Door
3	Curve Panel

Steps:

- 1) Attach upper extrusions to lower extrusions [2 to 1 and 4 to 3].
- 2) Attach (2) extrusions [5] between vertical assembly [1/2 and 3/4], placing insert between horizontals as shown in illustration.
- 3) Assemble counter base by connecting panel #1 to connect on vertical extrusion [1], then continue in numerical order.
- 4) Velcro internal shelf supports to inside of assembled counter base.
- 5) Place internal shelf atop supports.
- 6) Attach remaining horizontal extrusions [5] between vertical assembly, placing inserts where indicated.
- 7) Attach shelf supports [6] to vertical extrusion [2], then set shelves atop supports.

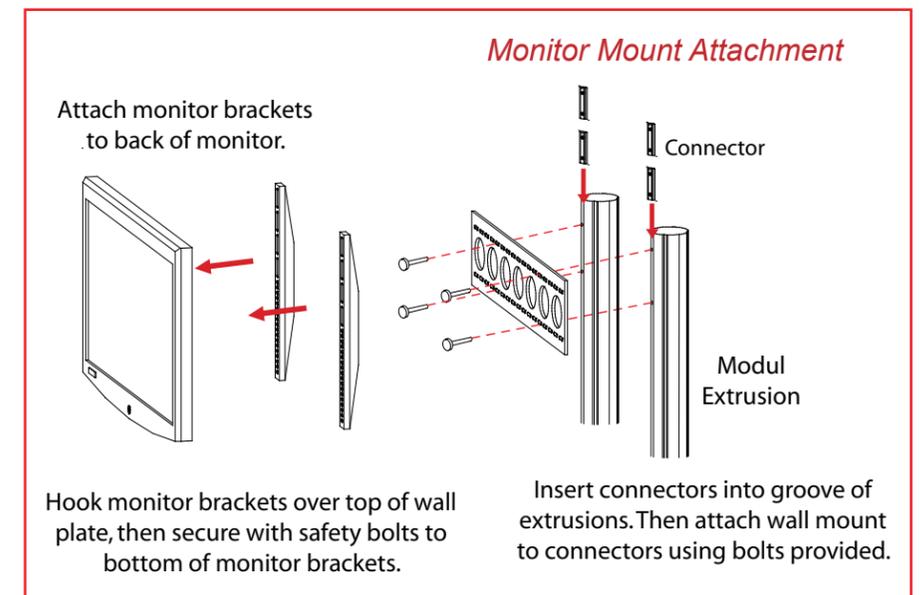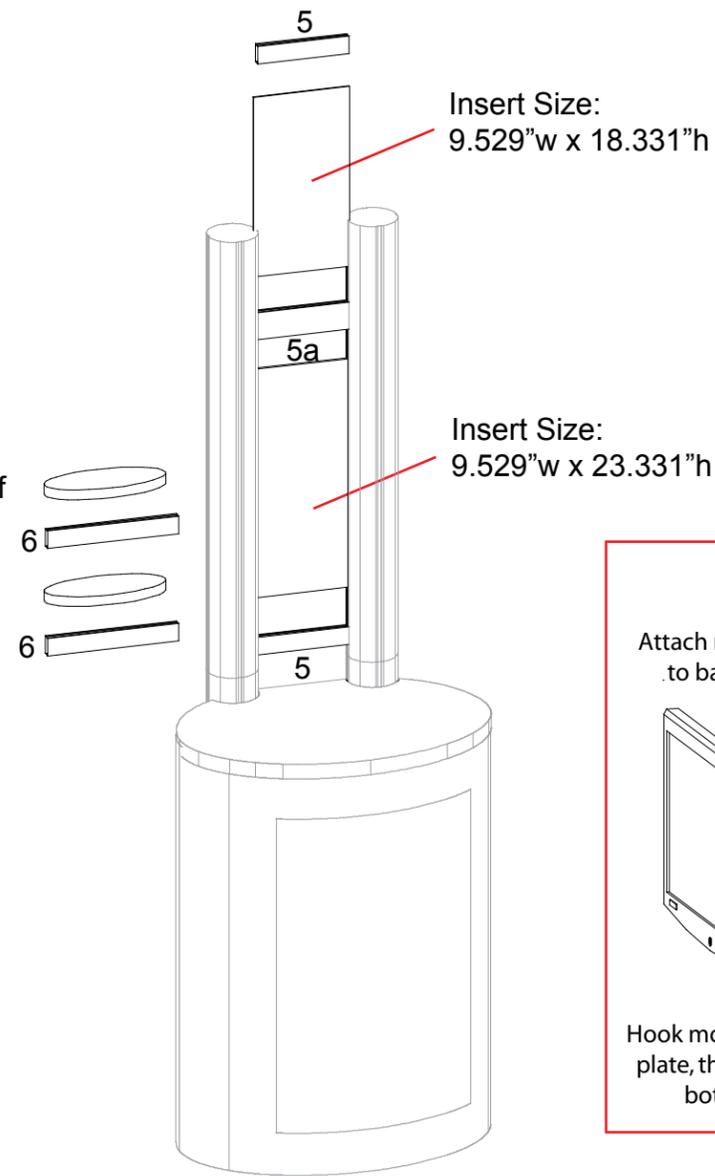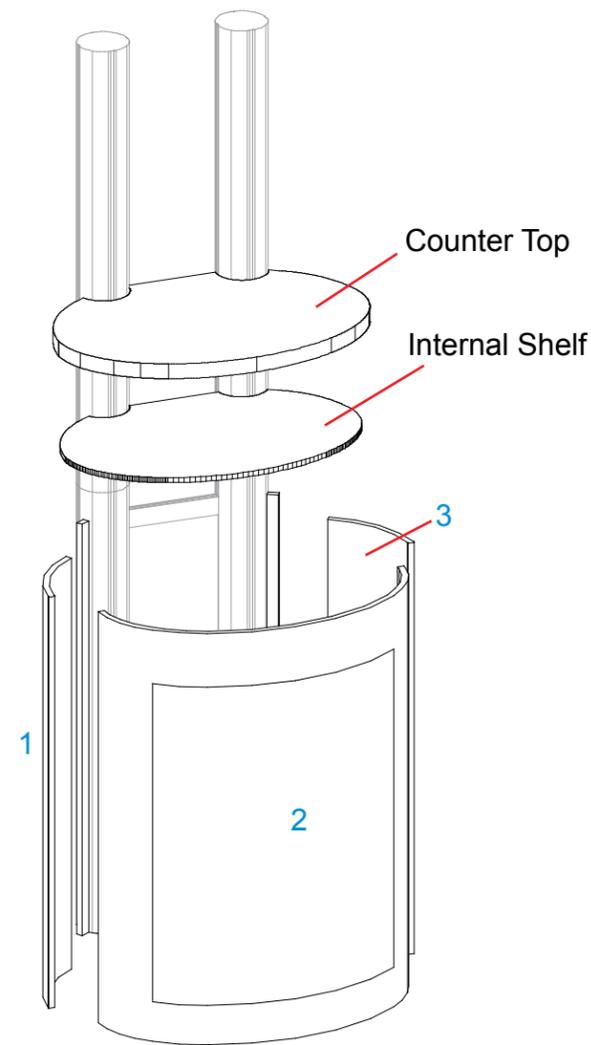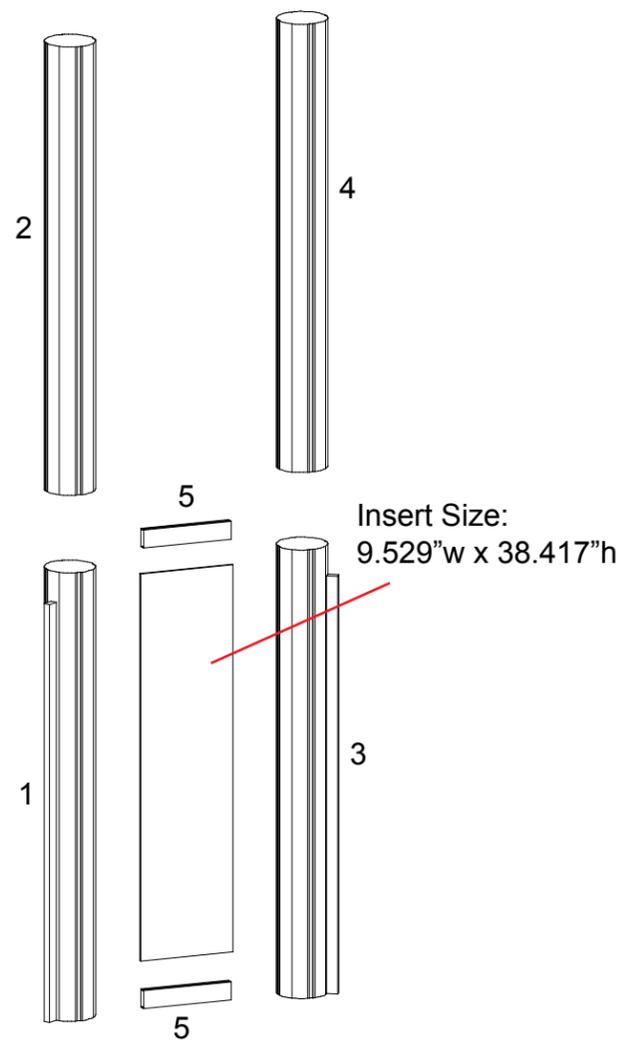

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

visionary™ DESIGNS

Using Your Setup Instructions

The Visionary Designs Setup Instructions are created specifically for your configuration. They are laid out sequentially, including an exploded view of the entire display, and then a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is **VERY IMPORTANT**.

Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts or countertops, use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.



The Tool

Most Visionary Designs exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Typical Connection

Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.



Typical Connection (cont'd)

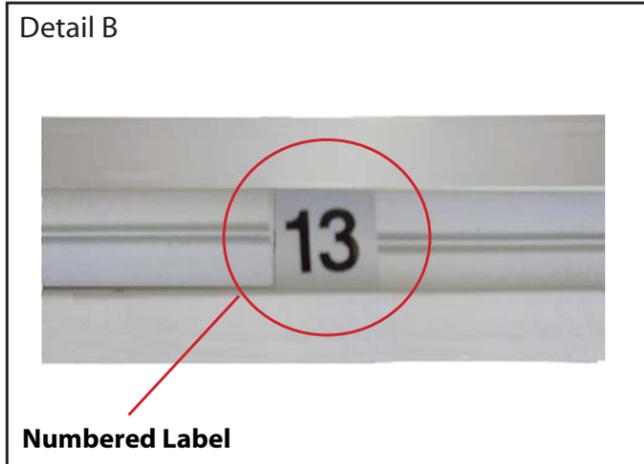

Numbered Label

Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With Visionary Designs the labels contain Black numbers unless otherwise specified.




Horizontal Inline Connection (remove only one setscrew)

Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

NOTE :


PDF copies of your Setup Instructions are available @ www.classicexhibits.com
Use the Search Tool located on the lower left-hand corner of the Classic Home page.
Enter your 5-7 digit Order #.

Search for Setup Instructions

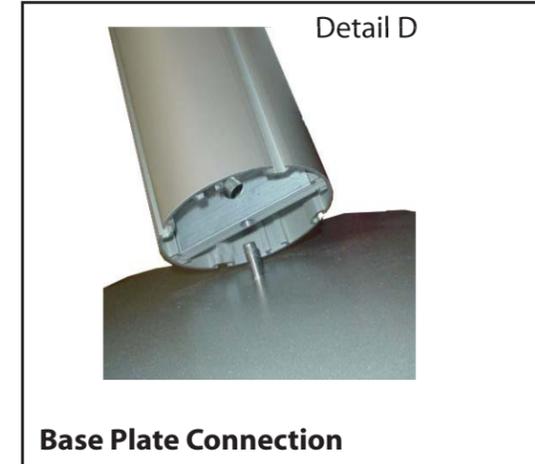

Base Plate Connection

Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

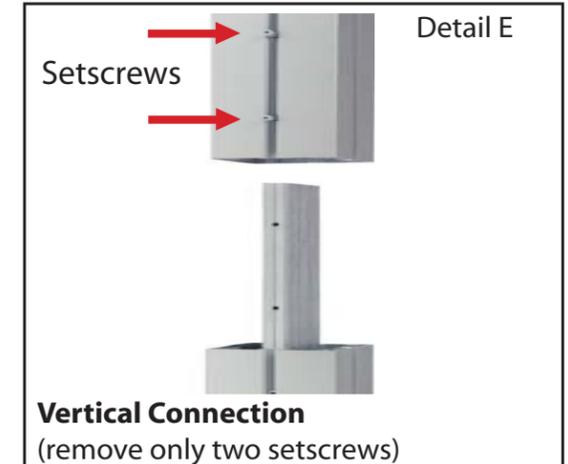


Vertical Connection
(remove only two setscrews)

When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller sections which then require assembly.


Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING


Case 1 of 2




44.5" Tapered Round Extrusion
Qty. : 4

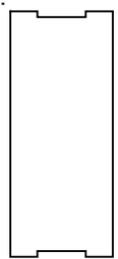


9.029" h Extrusion
Qty. : 4

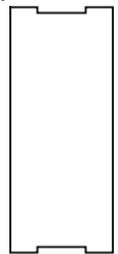


13" h Extrusion
Qty. : 2

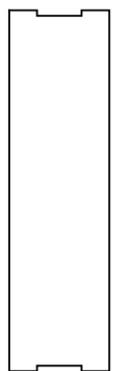


9.029" h Extrusion
Qty. : 1

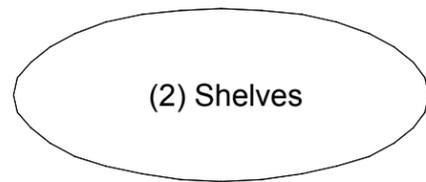

(2) Shelves

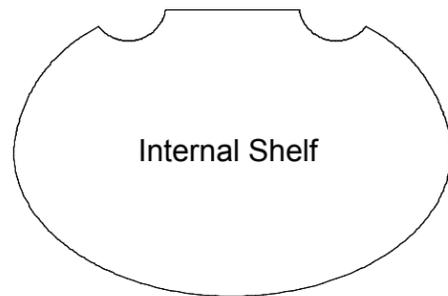

Internal Shelf

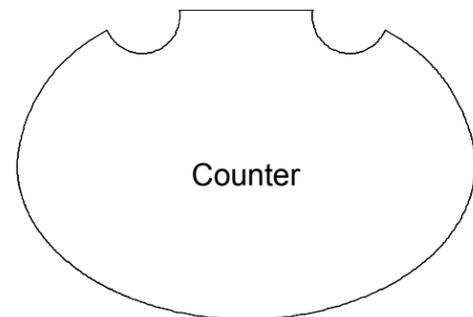


Counter

Additional Items:


Setup Hardware

Monitor Mount


Case 2 of 2

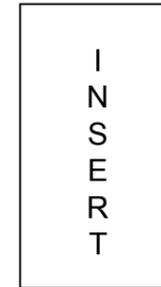


9.529" w x 18.331" h
Qty. : 1

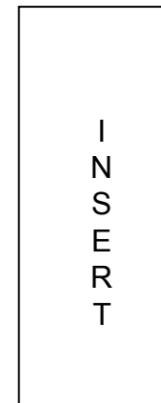

9.529" w x 23.331" h
Qty. : 1

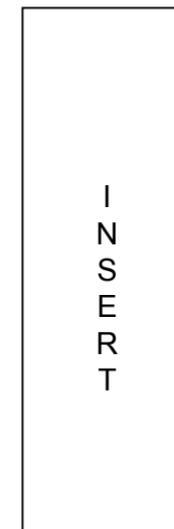

9.529" w x 38.417" h
Qty. : 1

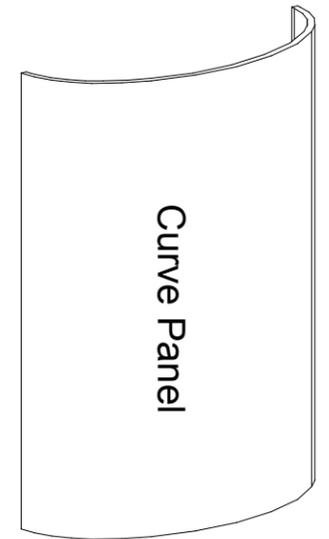

Curve Panel




(2) Small Curve Panels

Additional Items:


Oval Graphics

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING


Case 1 of 2




44.5" Tapered Round Extrusion
Qty. : 4

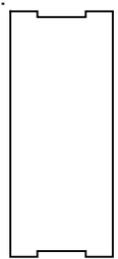


9.029" h Extrusion
Qty. : 4

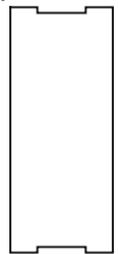


13" h Extrusion
Qty. : 2

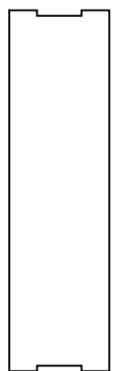


9.029" h Extrusion
Qty. : 1

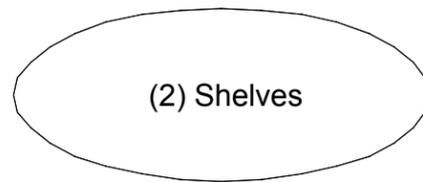

(2) Shelves

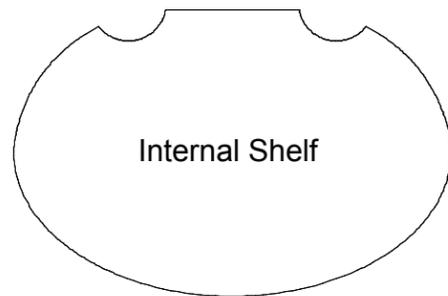

Internal Shelf

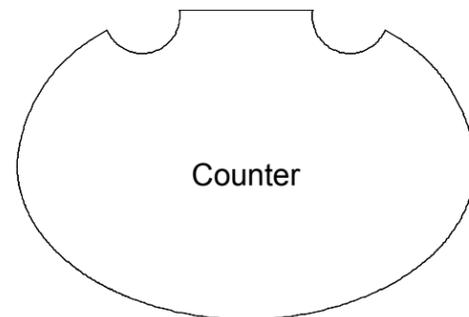


Counter

Additional Items:


Setup Hardware

Monitor Mount


Case 2 of 2

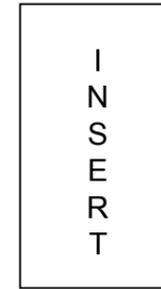


9.529" w x 18.331" h
Qty. : 1

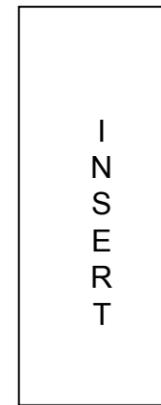

9.529" w x 23.331" h
Qty. : 1

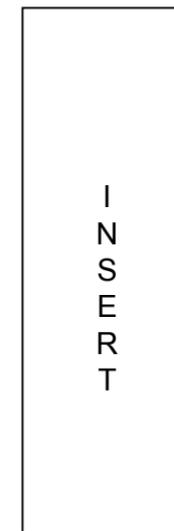

9.529" w x 38.417" h
Qty. : 1

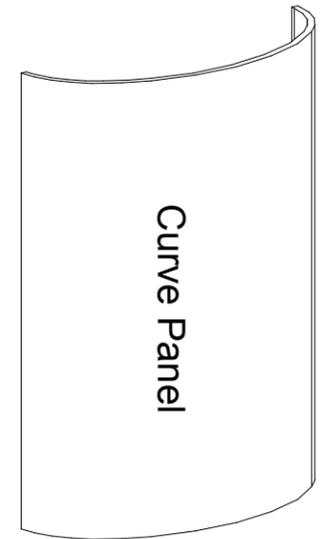

Curve Panel



(2) Small Curve Panels

Additional Items:

Oval Graphics

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING