


Item	Qty.	Description
1	2	Base Plate
2/2A	1/1	37.375" h Vertical Extrusion
3/3A	1/1	37.375" h Vertical Extrusion
4	2	20.25" w Horizontal Extrusion

Steps:

- 1) Connect verticals [2] to [2A] and [3] to [3A]. See **Extrusion Connector** detail.
- 2) Attach Base Plates [1] to vertical extrusions [2] and [3], using screws.
- 3) Attach horizontals [4] between vertical extrusions [2] and [3].
- 4) Attach Monitor Mount to verticals [2A] and [3A]. See **Monitor Mount Attachment** detail.
- 5) Attach Literature Holders to vertical assemblies [2/2A] and [3/3A], using Horizontal Connectors. See **Literature Holder Attachment** detail.

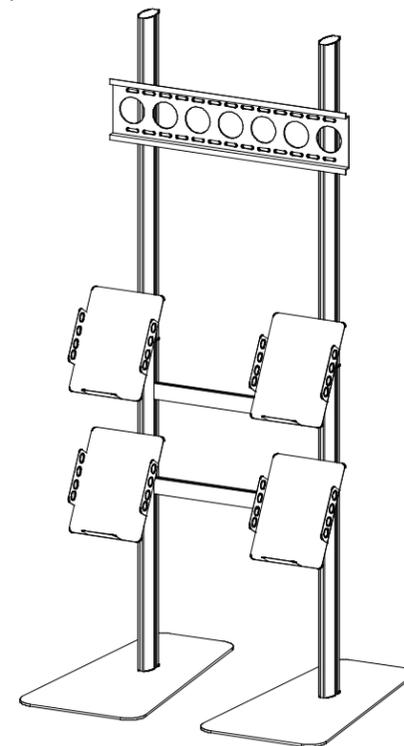

Completed Assembly

*** Monitor Mount Attachment**


Slide V4 Connectors into grooves of verticals. Tighten set screws.

Attach Monitor Mount to V4 Connectors, using bolts.

*** Extrusion Connector**

Slide upper extrusion over Vertical Connector and rest on lower extrusion. Secure with Set Screws.

To prevent product loss, Keep all screws attached to Vertical Connector, after disassembling.

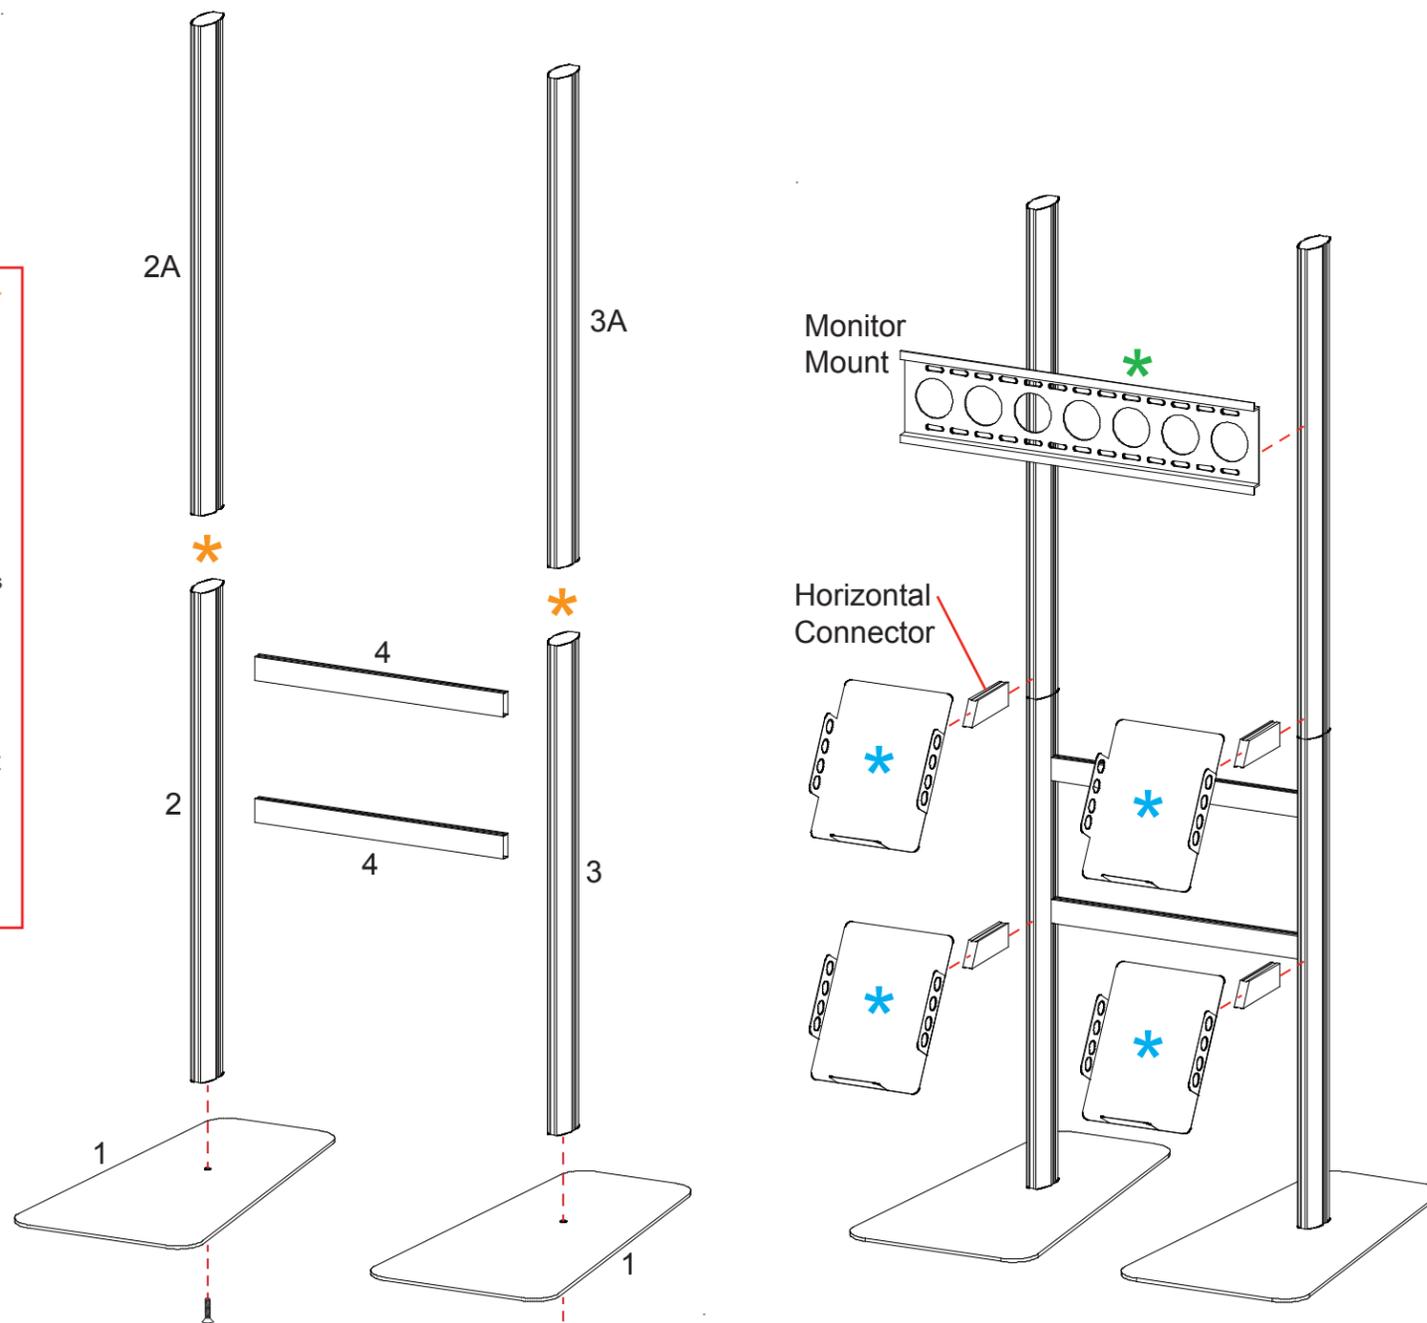

*** Literature Holder Attachment**

Attach angled end of Horizontal Connector to Literature Holder. Attach flat end of Horizontal Connector to Vertical Extrusion. Tighten locks to secure.

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.
Heat and UV exposure will warp and fade components.
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all setscrews and locks during disassembly

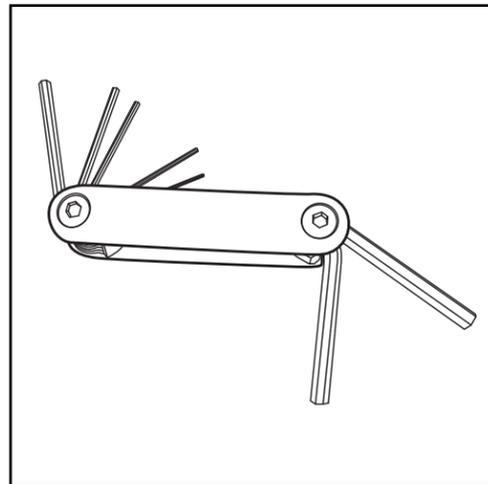


Hex Tool - Essential for Assembly

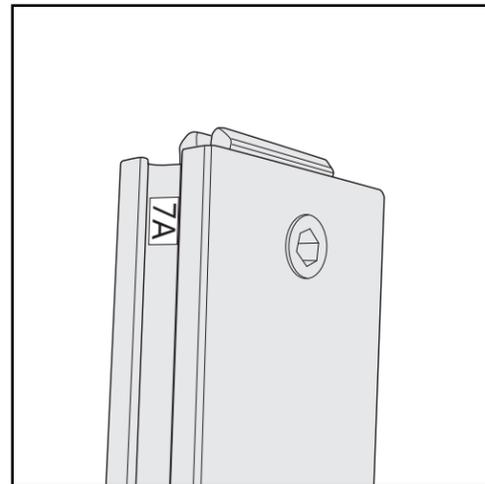


Part Identification - Numbering

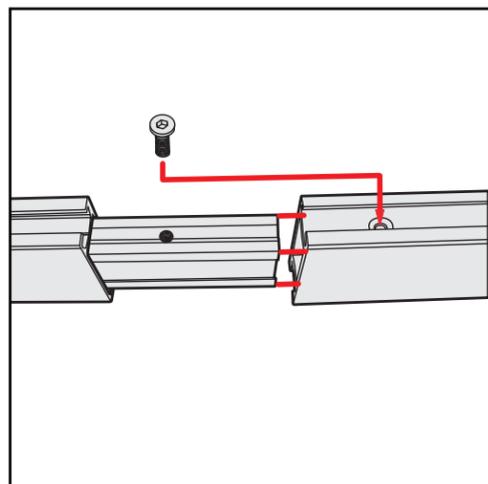


Spline Connection

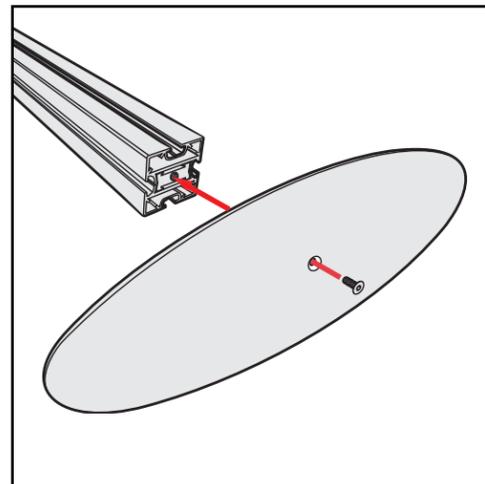

Base Plate & Extrusion Connection

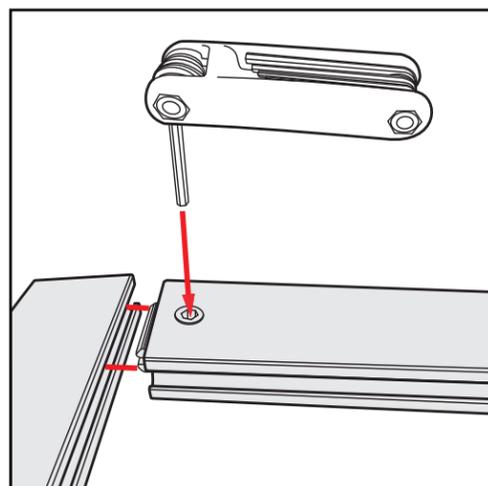

Extrusion & Lock Connection

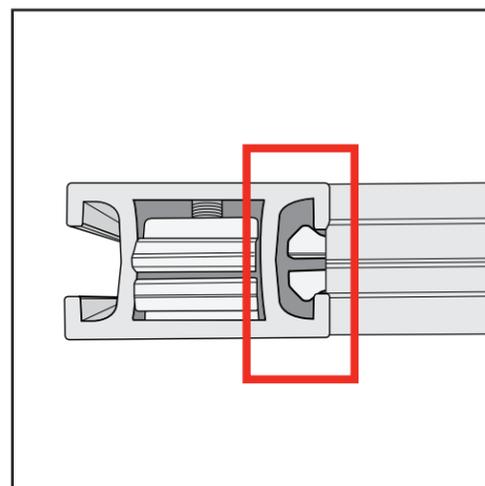

Engaged Lock



WARNING



DO NOT USE POWER TOOLS




LADDERS OR LIFTS
MAY BE REQUIRED




ALL CONNECTIONS MUST
BE TIGHTLY SECURED

Top View of Each Level

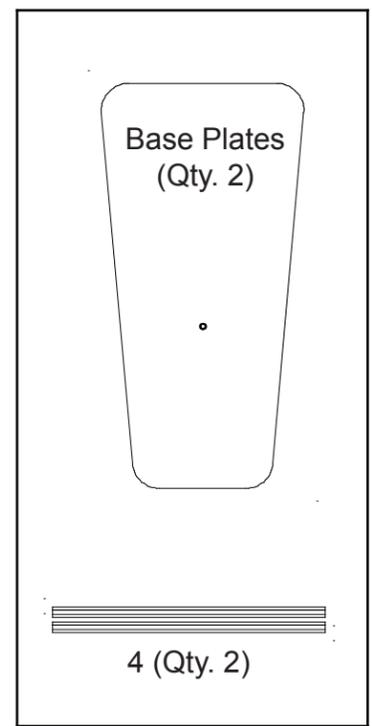

Level 1

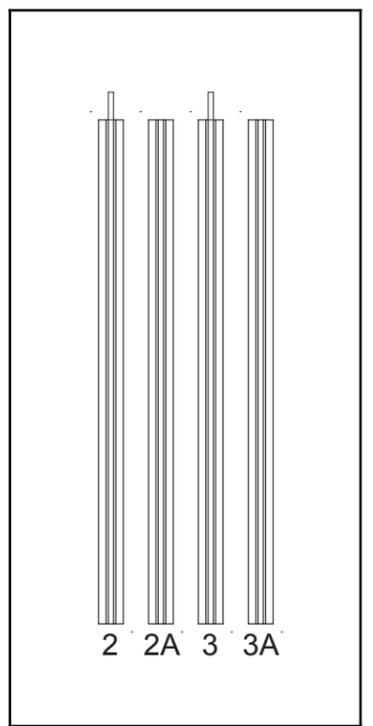

Level 2

Setup Hardware with Literature Holders

Monitor Mount