

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

visionary™ DESIGNS

Using Your Setup Instructions

The Visionary Designs Setup Instructions are created specifically for your configuration. They are laid out sequentially, including an exploded view of the entire display, and then a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.

Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is **VERY IMPORTANT**.

Cleaning and Packing Your Display

- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts or countertops, use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.



The Tool

Most Visionary Designs exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Typical Connection

Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.



Typical Connection (cont'd)

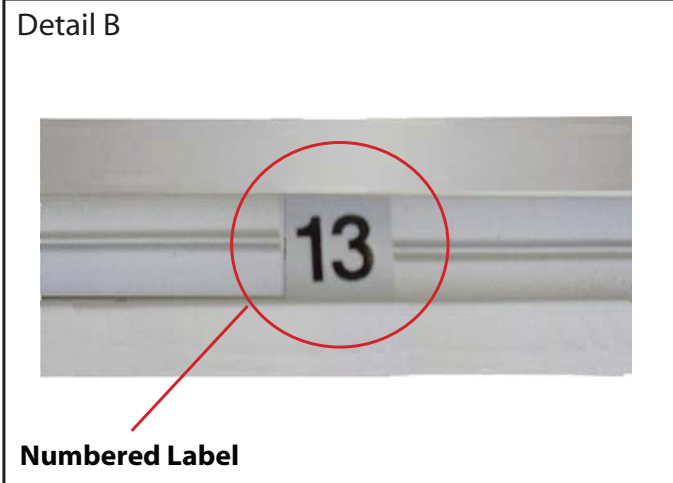

Detail B

Numbered Label


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With Visionary Designs the labels contain Black numbers unless otherwise specified.



Detail C

Horizontal Inline Connection (remove only one setscrew)


Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

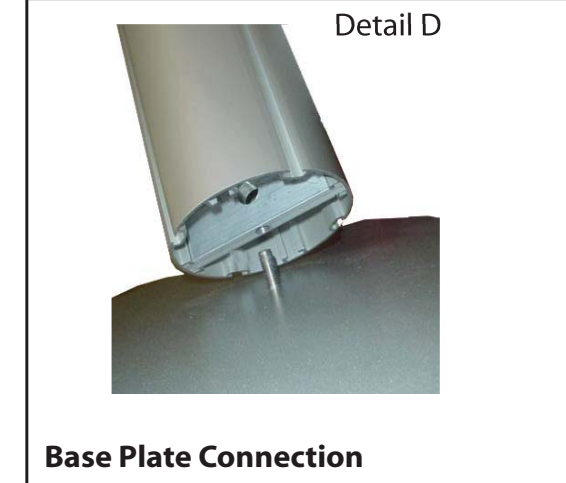

Detail D

Base Plate Connection

Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

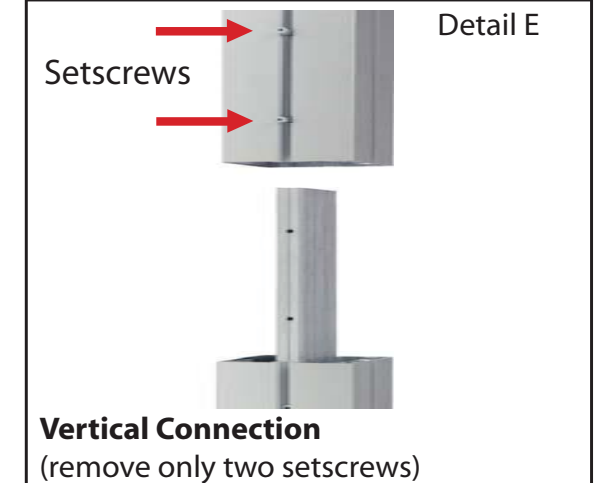

Detail E

Vertical Connection
(remove only two setscrews)

When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller sections which then require assembly.

Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Part Number	Qty	Description
1	2	Base Plate w/ pill slot
2	1	41.3874" Lower Curved Vertical extrusion
3	1	41.3874" Upper Curved Vertical extrusion
4	1	41.3874" Lower Curved Vertical extrusion
5	1	41.3874" Upper Curved Vertical extrusion
6a/6b	1/1	48" Horizontal extrusion tapered one end
7a/7b	1/1	48.8111" Curved Horizontal extrusion

Steps

- 1) Connect curved vertical extrusions [2 to 3 and 4 to 5] together.
- 2) Attach vertical assemblies [2/3 and 4/5] to base plates as indicated.
NOTE: See detail for connection.
- 3) Connect horizontal extrusions [6a to 6b and 7a to 7b] together.
- 4) Attach vertical assemblies [6a/6b and 7a/7b] between vertical assemblies [2/3 and 4/5].

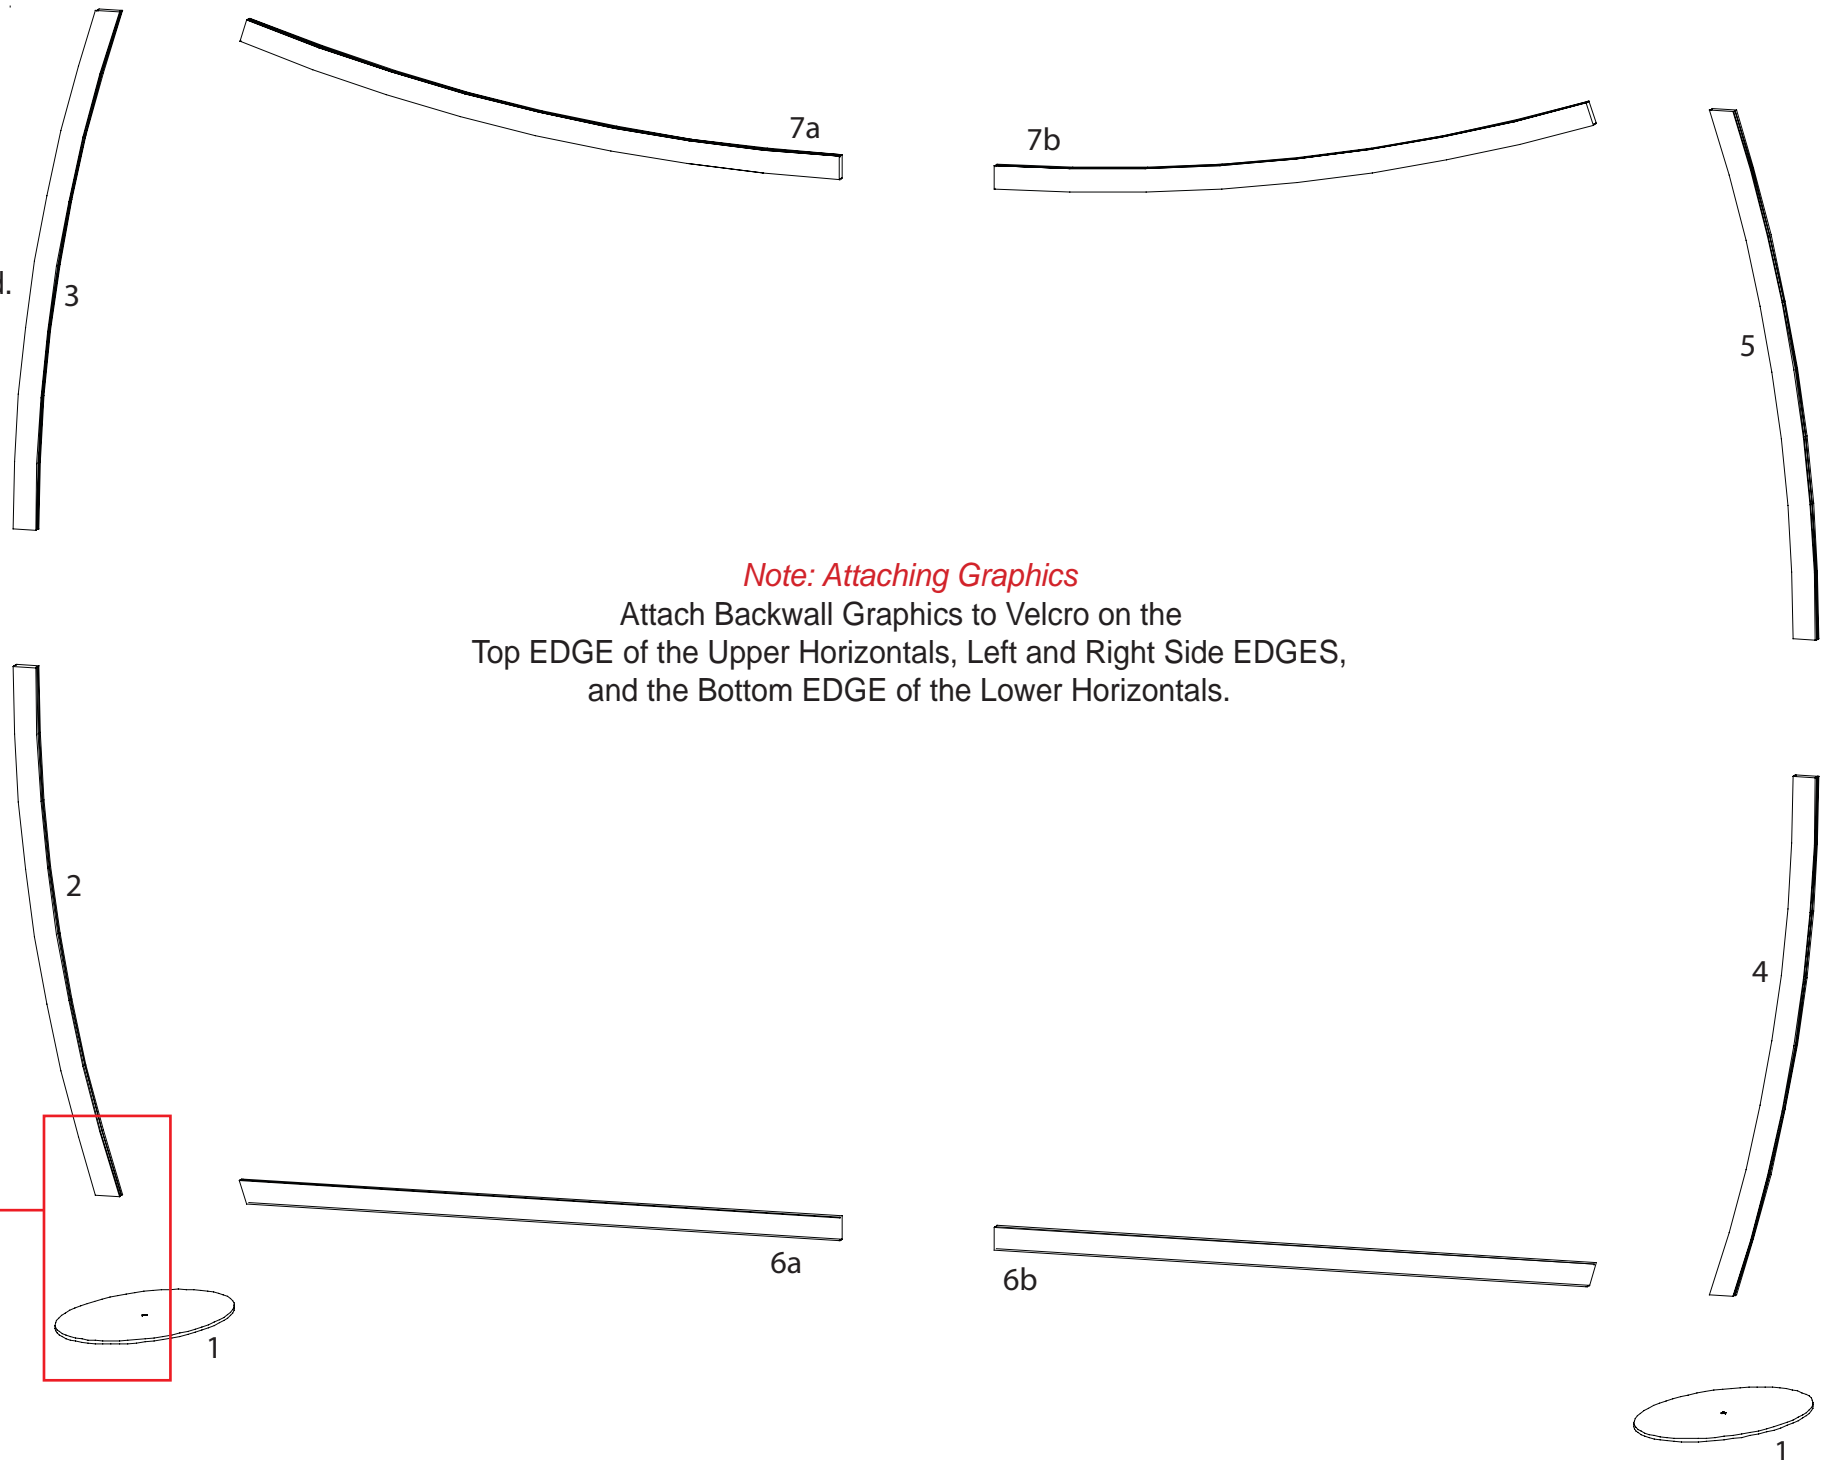

Note: Attaching Graphics


Attach Backwall Graphics to Velcro on the Top EDGE of the Upper Horizontals, Left and Right Side EDGES, and the Bottom EDGE of the Lower Horizontals.






Connect Vertical Extrusions to Base Plates by placing lock into slot and tighten with tool.

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

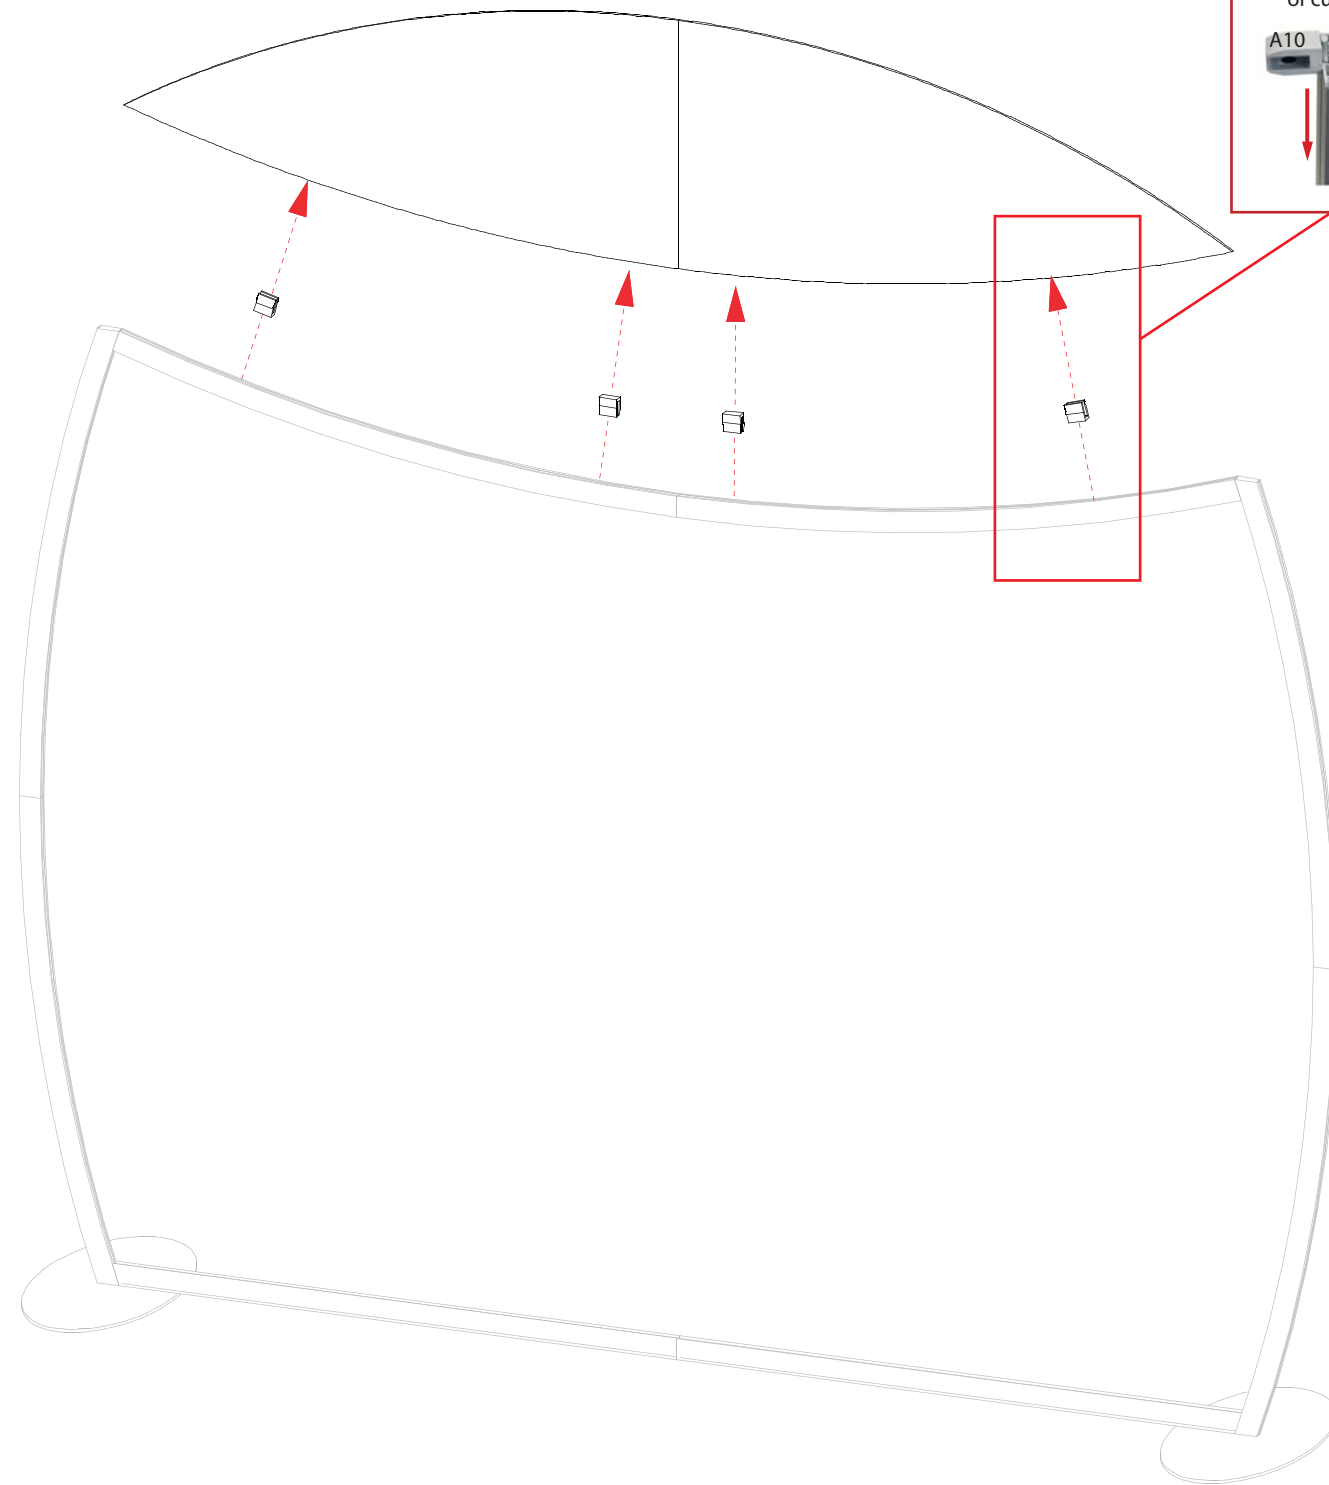866.652.2100




<p><i>Wing Attachment</i></p> <p>Slide A10 Clamp into groove of curved extrusion.</p>  <p>A10</p>	<p>When desired location is found, tighten set screw to secure.</p>  <p>Set-Screw</p>	<p>Tighten black plastic set screw to secure Wing in place.</p>  <p>Black Plastic Set-screw</p>
--	--	--

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

866.652.2100

Additional Accessories:



41.3874" Curved Extrusion

Qty. : 4

Located in Case : _____

48.8111" Curved Extrusion


Qty. : 2

Located in Case : _____

48" Tapered Extrusion

Qty. : 2


Located in Case : _____



A-10 Clamps

Qty. : 4


Located in Case : _____

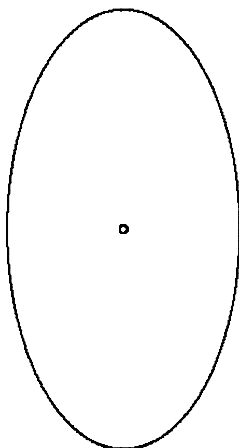

Oval Base Plate w/ 1 hole

Qty. : 2

Located in Case : _____

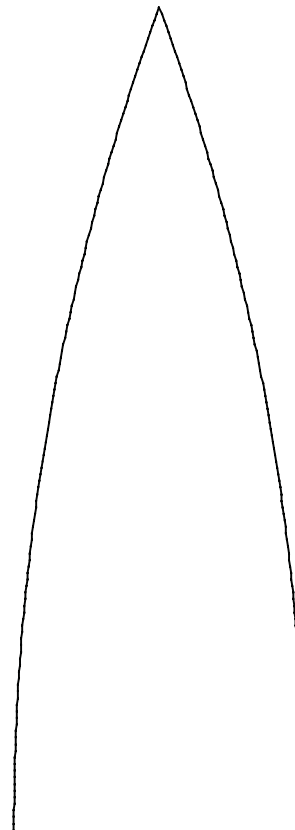

Header Pieces

Qty. : 2

Located in Case : _____

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING